



Anti-vibration carbide end mills

AE-VM SERIES

AE-VTSS · AE-VMS · AE-VMSX · AE-VMSS · AE-VML · AE-VMFE

Volume 12

AE-VMSX with reinforced cutting edge,
square type, Ø3 - Ø12 added



INDEX

AE-VTSS Short

Features & Cutting Data.....	PAGE	4~5
Dimensions	PAGE	16
Cutting Condition	PAGE	28

AE-VMS Short

Features	PAGE	6~9
Dimensions Square & Radius Type	PAGE	17~18
Dimensions RA - Right Angle Type.....	PAGE	19
Cutting Condition	PAGE	29~30
Cutting Data	PAGE	37~39

NEW

AE-VMSX With reinforced cutting edge

Features	PAGE	10~11
Dimensions Square	PAGE	24

AE-VMSS Stub

Features	PAGE	6~9
Dimensions Square Type	PAGE	20~21
Dimensions RA - Right Angle Type ...	PAGE	22
Dimensions Long Neck Type	PAGE	23
Cutting Condition	PAGE	31~32

AE-VML Long

Features	PAGE	12~13
Dimensions Square & Radius Type	PAGE	25
Cutting Condition	PAGE	34
Cutting Data	PAGE	43


AE-VML Chipbreaker Type

Dimension	PAGE	26
Cutting Condition	PAGE	34~35
Cutting Data	PAGE	42

AE-VMFE For Deep Side Milling

Features	PAGE	14~15
Dimensions Square & Radius Type	PAGE	27
Cutting Condition	PAGE	36

Product Lineup for Deep Side Milling

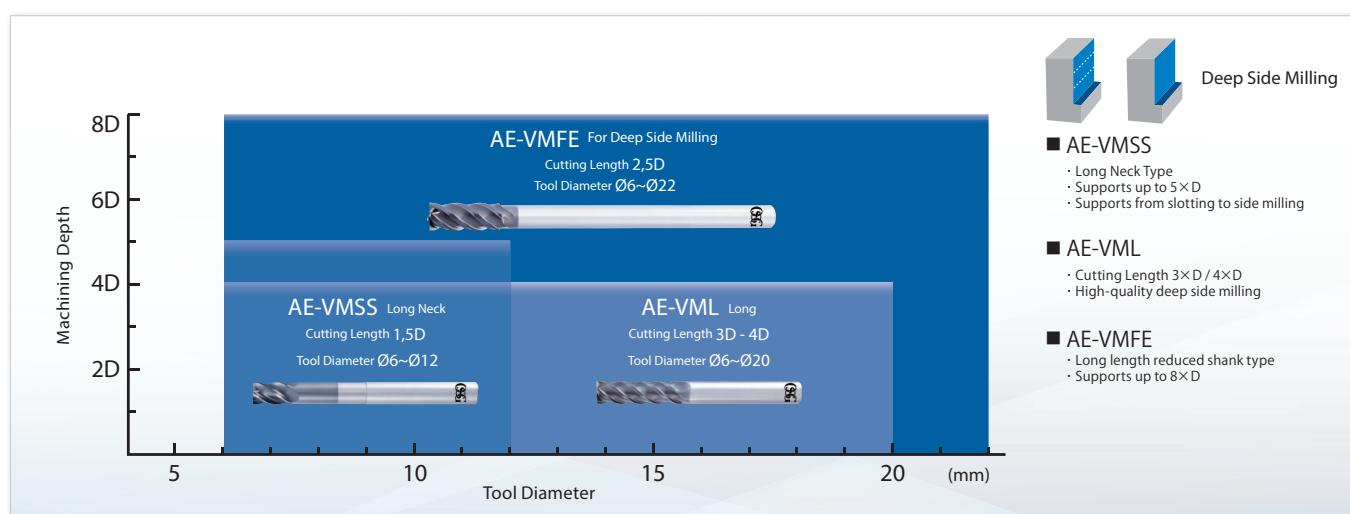


SELECTION CHART

		Cutting edge shape		Application					
		Square		Slot Milling	Side Milling	Helical Milling	Contour Milling	Ramping	
AE-VMS Short	Page 17-18								
	Right Angle								
	Page 19								
	Radius								
	Page 17-18								
AE-VMSS Stub	Square								
	Page 20-21								
	Right Angle								
	Page 22								
	Long Neck								
	Page 23								
		Cutting edge shape		Application					
AE-VML Long	Square								
	Page 25								
	Radius								
	Page 25								
	Square with Chipbreaker								
	Page 26								
AE-VMFE For deep side milling	Square								
	Page 27								
	Radius								
	Page 27								
AE-VMSX Short	Square								
	Page 24								

Right angle type for milling straight corners

Right angle implies "straight angle." The right angle type end mill features a unique geometry that maintains a consistent cutting diameter even with a gash land.

Ability to mill straight corners while maintaining cutting edge rigidity.

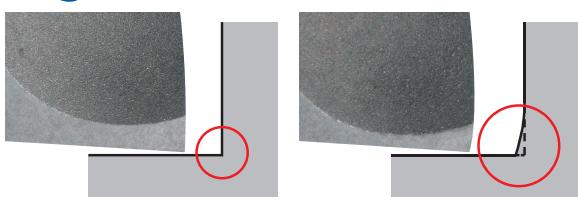

Right Angle Type

Square Type

KEY FEATURES: AE-VTSS

1 Anti-Vibration Carbide End Mill
Compatible with Sliding Head Lathes

2 Length of cut $1,5 \times D$ or less
 $\varnothing 3 \sim \varnothing 5$: $1,5 \times D$ or less
 $\varnothing 6 \sim \varnothing 12$: $1 \times D$

3 Overall length 50mm or less
 $\varnothing 3 \sim \varnothing 10$: 45mm
 $\varnothing 12$: 50mm




AE-VTSS: THE A-BRAND END MILL

Multi-functional and highly efficient machining 3-flute specification and bottom cutting edge hook shape


Stable chip shape and improved chip evacuation

Can be used for a wide variety of processing such as plunging

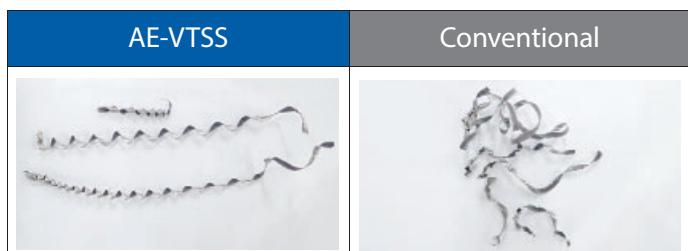


Chip shape from plunging

Work Material : SUS304

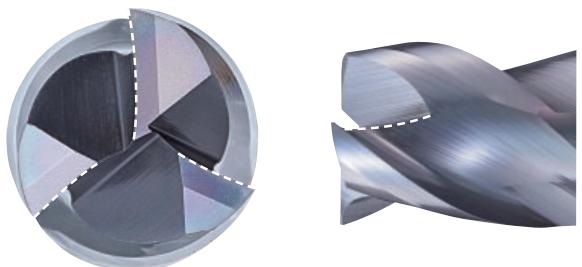

Unequal spacing of teeth and variable-lead geometry

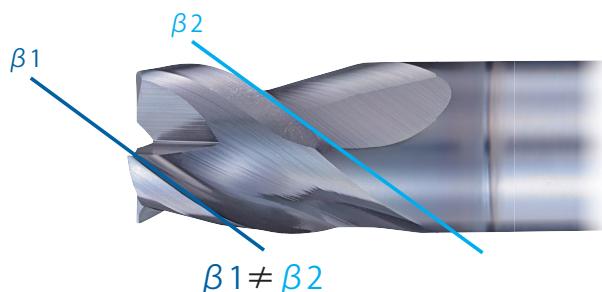

Stable and high efficiency milling is made possible by the suppression of chattering

CUTTING DATA

Work Material: SCM435


Bar Material Ø12

Machine: CNC sliding head lathe

Coolant: None

Dry machining is used for filming purposes

Processed shape

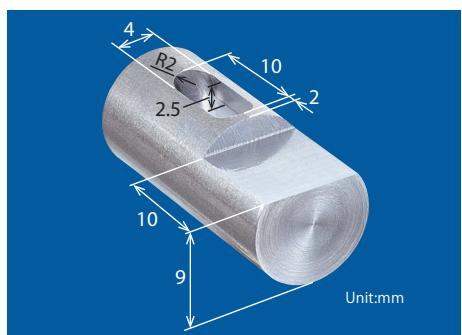

For roughing of the slot, the same machining is performed twice to secure a depth of 2.5mm.

Scan code for video



KEY FEATURES: AE-VMS • AE-VMSS



1 Durarise coating

2 Positive rake angle

3 New flute form


4 High rigidity

5 Solid carbide

AE-VMS: THE A-BRAND END MILL

Duarise coating

The new duarise coating provides excellent lubricity, superior friction-resistance and high oxidation temperature. Multi-layer construction minimizes the thermal cracks that often occurred while using water-soluble oil.

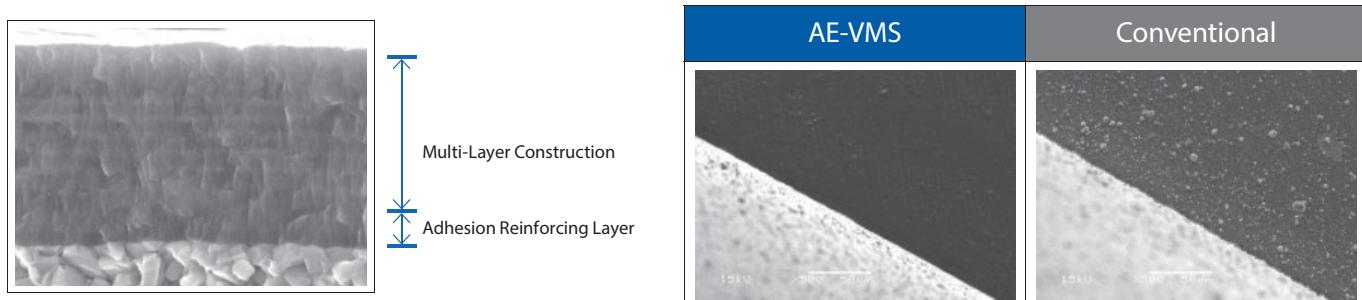

Smoothing surface coating treatment made an excellent quality of surface finishing.

Positive rake angle

A stable performance is gathered by reducing cutting forces as a result of a sharp and positive rake angle.

New flute form

The new flute form with its excellent chip evacuation properties enables stable milling and the suppression of burrs.

Figure 1. 10% lower cutting force versus the competitors



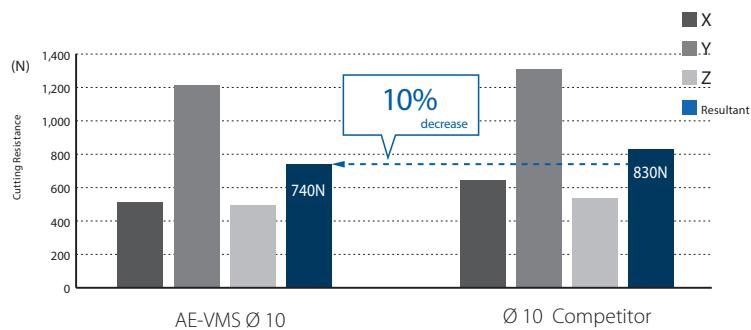


Figure 2. Stable performance even when the overhang length is L/D=4

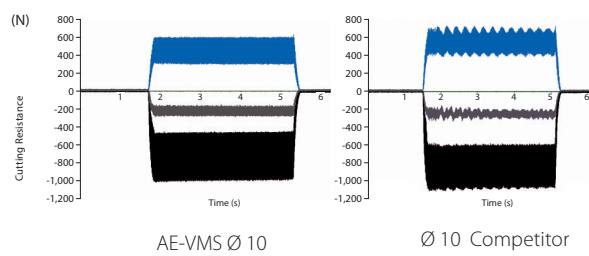


High rigidity

The unequal spacing of teeth and variable-lead geometry enables stable and high efficiency milling and the suppression of vibration.

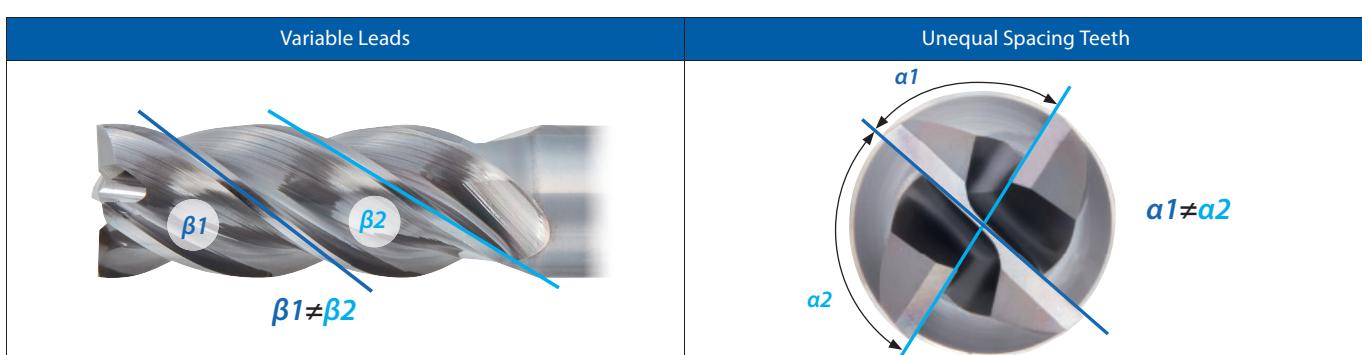


Milling straight corners with a unique cutting edge

Gash land for enhancing chipping resistance

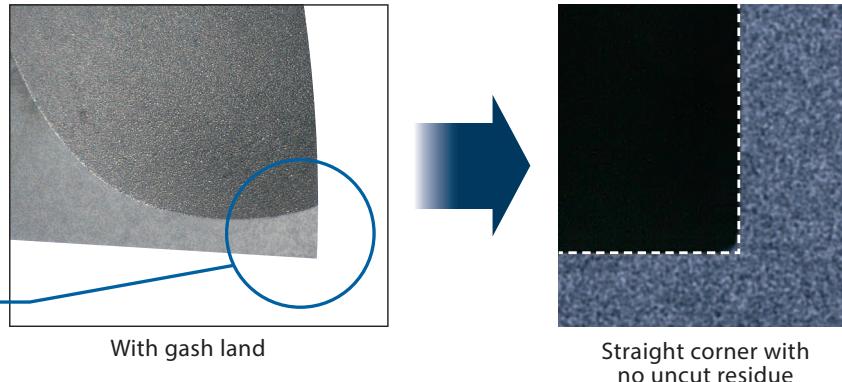


Ability to mill straight corners while maintaining cutting edge rigidity

Milling | Solid carbide

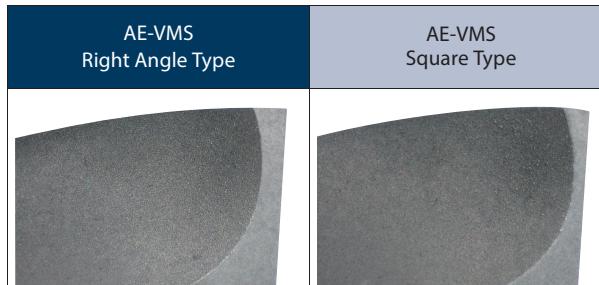

Although the right angle type end mill includes a gash land, it is able to mill straight corners due to its unique geometry that maintains a consistent cutting diameter.

Measured value of change in cutting edge of Ø6 end mill

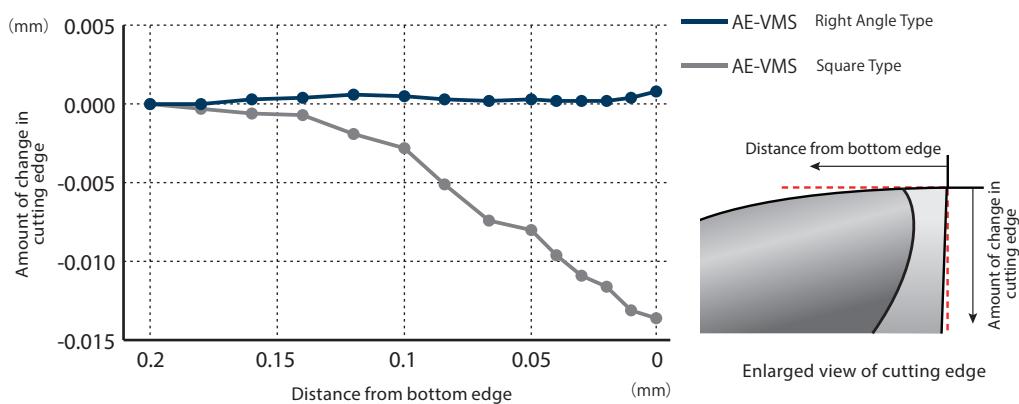


* The values measured are internal data. The amount of change in the cutting edge may vary depending on the individual product.

AE-VMSS■AE-VMS: (-RA) RIGHT ANGLE TYPE

High milling quality Straight corner

The milling of straight corners with no uncut residue is made possible by a unique cutting edge


Tool	AE-VMS Ø 3 - Right Angle
Work Material	S50C
Milling Method	Side Milling
Cutting Speed	$V_c=91\text{m/min}$ (9.660min-1)
Feed	$V_f=1.160\text{mm/min}$ (0,03mm/t)
Depth of Cut	$a_p=4,5\text{mm}(1,5D)$ $a_e=0,6\text{mm}(0,2D)$
Coolant	Air Blow

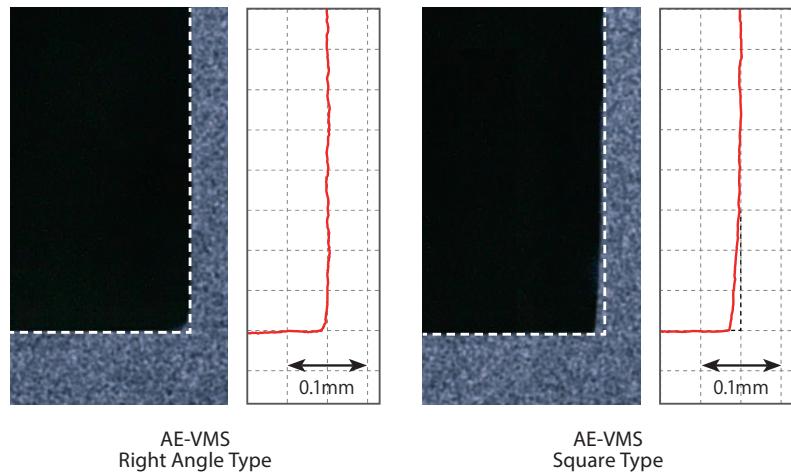

Stable Performance Cutting edge rigidity

Normal progress of wear without chipping due to the gash land

Tool	AE-VMS Ø 6 - Right Angle
Work Material	S50C
Milling Method	Side Milling
Cutting Speed	$V_c=130\text{ m/min}$ (6.900min-1)
Feed	$V_f=1.380\text{mm/min}$ (0,05mm/t)
Depth of Cut	$a_p=9\text{mm}(1,5D)$ $a_e=1,2\text{mm}(0,2D)$
Coolant	Air Blow

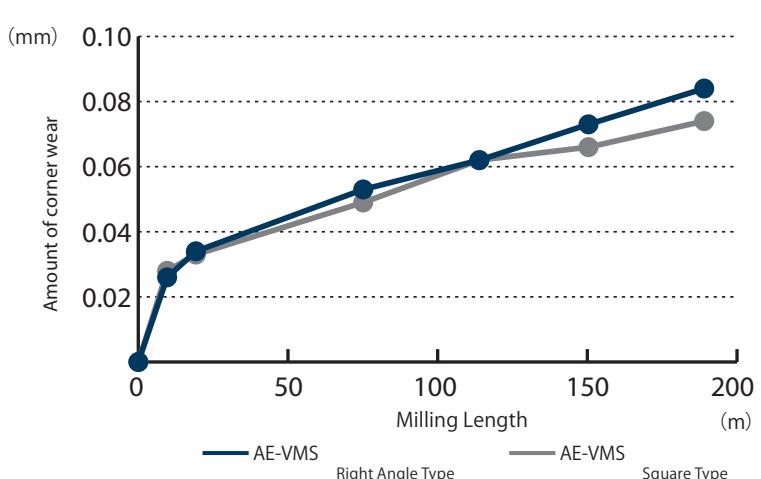

KEY FEATURES: AE-VMSX



1

High-strength cutting edge specification suppresses chipping, leading to greater efficiency and extended tool life

2

Microrelief and cutting edge honing
Strengthening of the cutting edge and suppress chattering


3

Web taper
Improves tool rigidity

High chipping resistance

HPM38 (52HRC)

Work Material	AE-VMSX Ø10	Conventional (Equal spacing of teeth and equal-lead geometry)
Cutting Speed	90m/min (2,900min ⁻¹)	70m/min (2,200min ⁻¹)
Feed Rate	680mm/min (0.059mm/t)	410mm/min (0.047mm/t)
Wear comparison of the peripheral cutting edge		

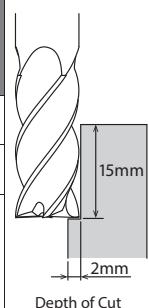


AE-VMSX: THE A-BRAND END MILL

Durability

Durorey Coating

Super heat-resistant and high-toughness coating suppresses chipping and achieves long tool life.

Super heat resistant layer and ultra-fine periodic nano-layered structure provide superior toughness while maintaining high heat resistance and abrasion resistance. Also suppresses chipping even in high hardness milling and achieves long tool life.

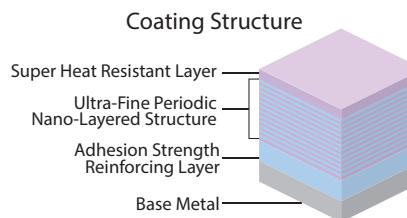

Coating Color	Coating Structure	(GPa) Hardness	(C°) Oxidation Temperature	Heat Resistance	Adhesion Strength	Surface Roughness	Wear Resistance	Welding Resistance	Toughness
Black Gray	Ultra-Fine Periodic Nano-Layered	41	1.300	☆	◎	○	☆	◎	◎


○→○→☆
Fair Best

Chipping resistance


Enhanced chipping resistance

Microrelief and cutting edge honing increase the strength of the cutting edge and improve chipping resistance

Microrelief

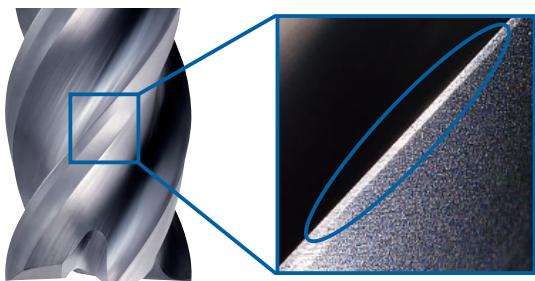

Cutting edge honing

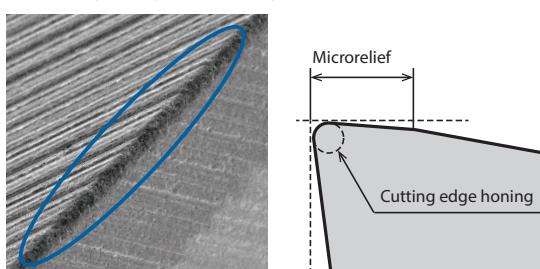


Stable Performance

Suppression of Vibration

Stable machining is achieved with chatter vibration suppression specifications and high tool rigidity


Unequal spacing of teeth and variable-lead geometry

Suppresses the occurrence of chatter vibrations.

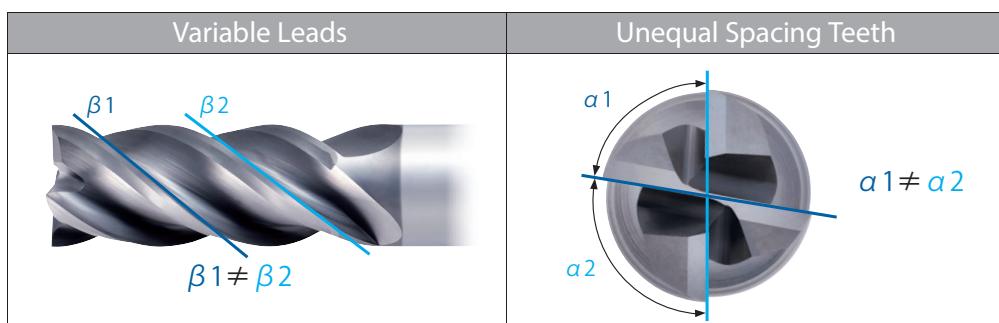

Web taper


The web taper geometry, where the thickness of core changes from the cutting edge to the shank, greatly improves tool rigidity

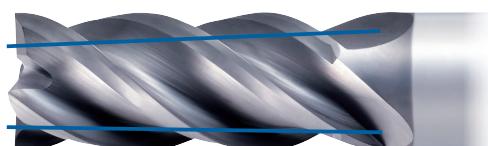

KEY FEATURES: AE-VML



AE-VML: ULTIMATE SIDE MILLING EFFICIENCY

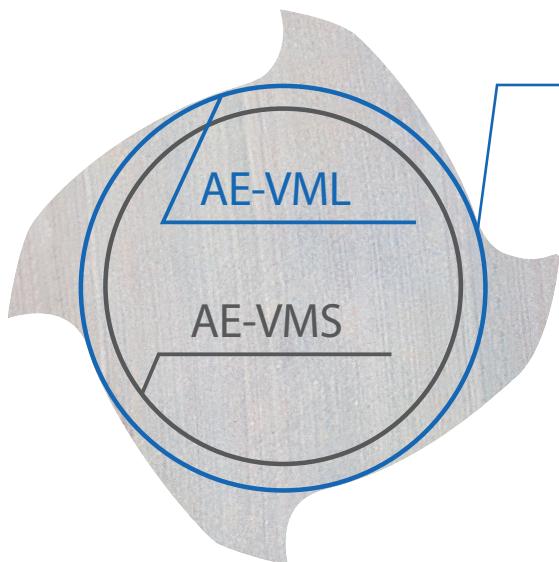

High Rigidity




High-speed side milling is made possible by the large thick core design. The web taper geometry, where the thickness of core changes from the cutting edge to the shank, greatly improves tool rigidity, thereby prevents the machining surface from tilting

High Helix



Reduces cutting force to enable stable milling

Suppression of vibration

The combination of variable lead, unequal spacing teeth and microrelief geometry contributes to stable and high efficiency milling performance.

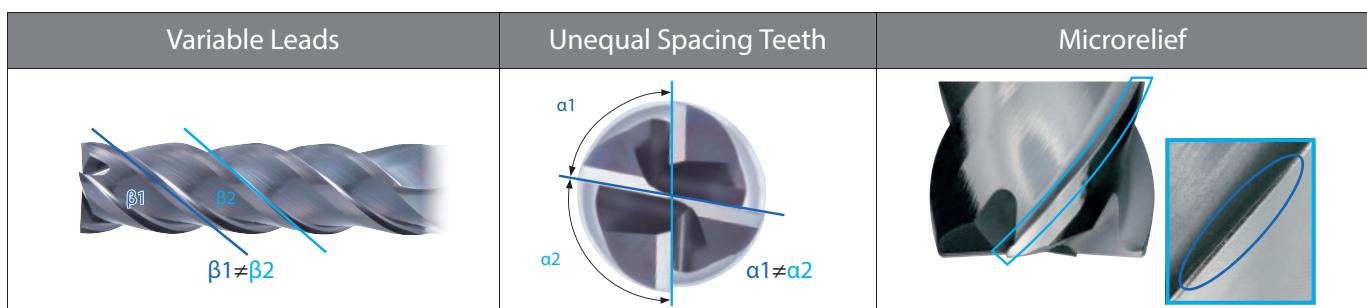


Chattering is greatly suppressed even during high-speed, high-depth milling, resulting in unrivaled high efficiency performance.

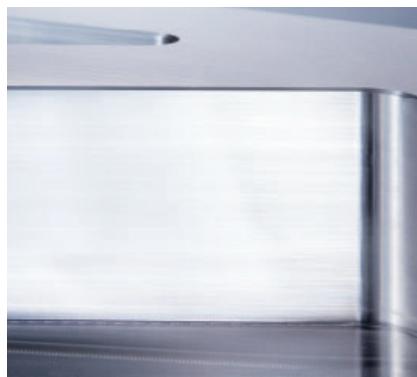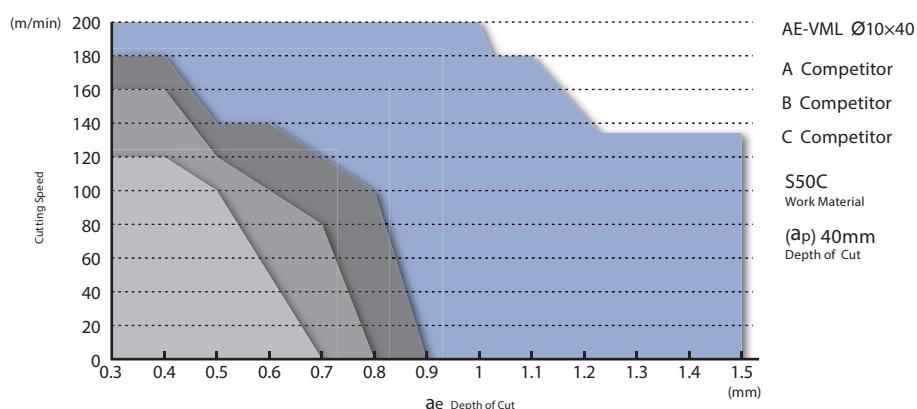


DUARISE Coating

Provides excellent lubricity, superior friction-resistance and high oxidation temperature. Multi-layer construction minimizes the thermal cracks that often occurred while using watersoluble oil.

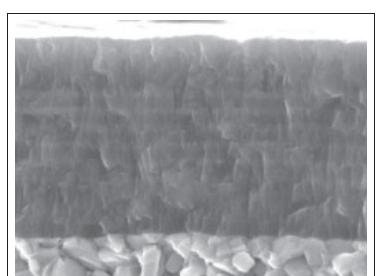

Multi-Layer Construction
Adhesion Reinforcing Layer

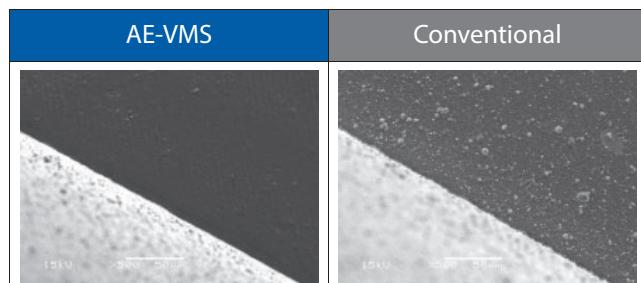

Smoothing surface coating treatment made an excellent quality of surface finishing.



Highly efficient and highly accurate deep side milling at L/D of 5 or more



2.5xD cutting length


Highly efficient deep side milling is possible with large step milling of up to $2 \times D^*$

*The recommended depth of cut varies depending on the overhang length.

Long length reduced shank type

Reduced shank types are tools with an outer diameter that is larger than the shank diameter

- Supports deep side milling and pocket milling of mold parts, etc.
- Supports various machining depths by changing the overhang length

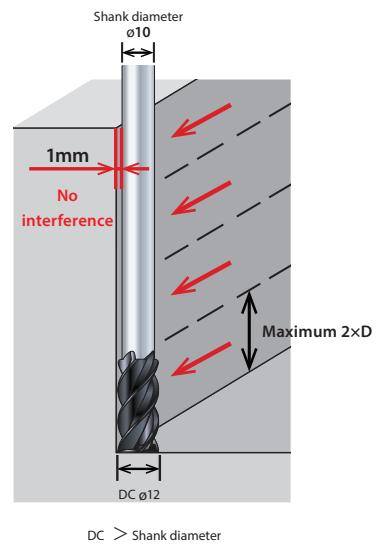

R shape on the shank side edge

Suppresses streak generation by side step milling

Tool specifications engineered to suppress chattering


The combination of variable lead, unequal spacing teeth and microrelief geometry contributes to stable and high efficiency milling performance

High Efficiency - High Precision

Stable deep side milling at L/D=7


Achieves good milling accuracy with about twice the efficiency versus conventional products

Tool	AE-VMFE Ø 12 (L.O.C. 30mm)	Conventional Ø 12 (L.O.C. 18mm)	Conventional Extra-long type Ø 12 (L.O.C. 90mm)
Work Material	SKD61(40HRC)		
Milling Method	Side Step Milling		Side Milling
Cutting Speed	120m/min (3.183min ⁻¹)	90m/min (2.387min ⁻¹)	25m/min (663min ⁻¹)
Feed Rate	1.061mm/min (0,083mm/t)	800mm/min (0,084mm/t)	132mm/min (0,05mm/t)
Depth of Cut	ap=18mmx4 times ae=0,05mm	ap=12mmx6 times ae=0,05mm	ap=72mm ae=0,05mm
Overhang Length	84mm L/D=7		100mm
Processing Time	Approximately 23 Seconds	Approximately 45 Seconds	Approximately 45 Seconds
Coolant	Air Blow		
Machine	Vertical Machining Center (BT40)		

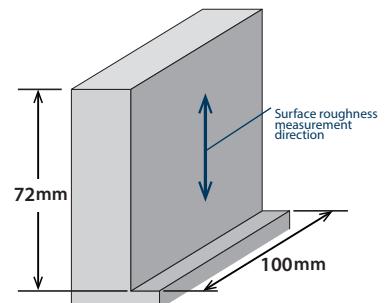


Machining accuracy

After machining

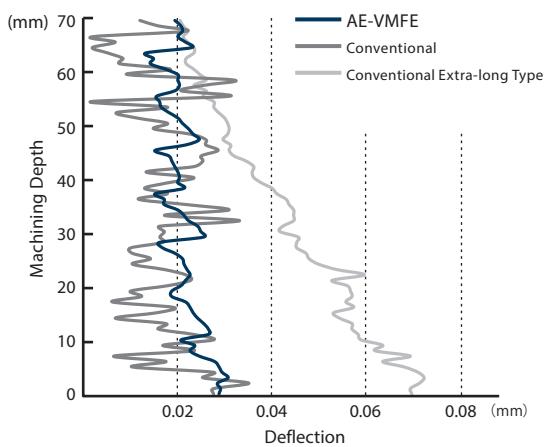

AE-VMFE	Conventional	Conventional Extra-long Type
Ra : 0,09µm Rz : 1,03µm	Ra : 1,45µm Rz : 7,49µm	Ra : 1,46µm Rz : 8,07µm

After zero cut

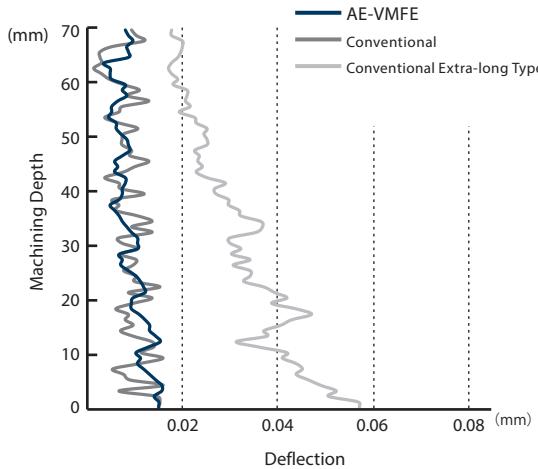

AE-VMFE	Conventional	Conventional Extra-long Type
Ra : 0,08µm Rz : 0,96µm	Ra : 1,07µm Rz : 6,37µm	Ra : 1,17µm Rz : 6,99µm



AE-VTSS


Milling | Solid carbide





Type 1



Type 2

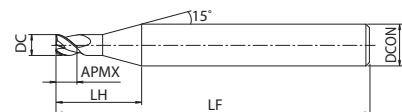

Type 3

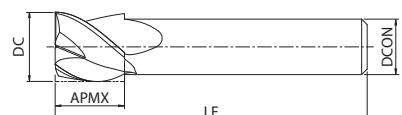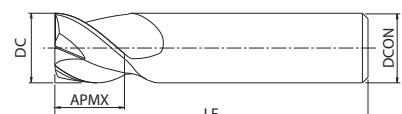

- First choice in quality and performance
 - Anti-Vibration Carbide End Mill Compatible with Sliding Head Lathes
 - Wide variety in applications and work materials
 - 3 flutes, variable helix and unequal spacing







Type 1



Type 2

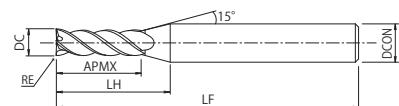

- First choice in quality and performance
- Carbide end mill with Durarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing



EDP	Z	D	R	L	I	d	Type	Prix
8555830	4	3	-	60	8	6	1	
8556050	4	3	0,2	60	8	6	1	
8556060	4	3	0,5	60	8	6	1	
8555840	4	4	-	60	11	6	1	
8556070	4	4	0,2	60	11	6	1	
8556080	4	4	0,5	60	11	6	1	
8556090	4	4	1	60	11	6	1	
8555850	4	5	-	60	13	6	1	
8556100	4	5	0,2	60	13	6	1	
8556110	4	5	0,5	60	13	6	1	
8556120	4	5	1	60	13	6	1	
8555860	4	6	-	60	13	6	2	
8556130	4	6	0,3	60	13	6	2	
8556140	4	6	0,5	60	13	6	2	
8556150	4	6	1	60	13	6	2	
8555880	4	8	-	70	19	8	2	
8556160	4	8	0,3	70	19	8	2	
8556170	4	8	0,5	70	19	8	2	
8556180	4	8	1	70	19	8	2	
8556190	4	8	1,5	70	19	8	2	
8556200	4	8	2	70	19	8	2	
8555900	4	10	-	80	22	10	2	
8556210	4	10	0,3	80	22	10	2	
8556220	4	10	0,5	80	22	10	2	
8556230	4	10	1	80	22	10	2	
8556240	4	10	1,5	80	22	10	2	
8556250	4	10	2	80	22	10	2	
8556260	4	10	3	80	22	10	2	
8555920	4	12	-	90	26	12	2	
48354123	4	12	0,3	90	26	12	2	
8556270	4	12	0,5	90	26	12	2	
8556280	4	12	1	90	26	12	2	
8556290	4	12	1,5	90	26	12	2	
8556300	4	12	2	90	26	12	2	
8556310	4	12	3	90	26	12	2	






Type 1



Type 2

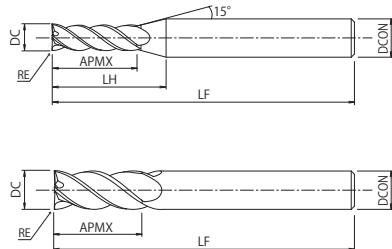

- First choice in quality and performance
- Carbide end mill with Durarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing




EDP	ZEFP	DC	RE	LF	APMX	DCON	Type	Price
8555960	4	16	-	100	32	16	2	
8557300	4	16	0,5	100	32	16	2	
8557301	4	16	1	100	32	16	2	
48354163	4	16	1,5	100	32	16	2	
8557302	4	16	2	100	32	16	2	
8557303	4	16	2,5	100	32	16	2	
8557304	4	16	3	100	32	16	2	
8557305	4	16	4	100	32	16	2	
8556000	4	20	-	110	40	20	2	
8557310	4	20	0,5	110	40	20	2	
8557311	4	20	1	110	40	20	2	
8557312	4	20	2	110	40	20	2	
8557313	4	20	2,5	110	40	20	2	
8557314	4	20	3	110	40	20	2	
8557315	4	20	4	110	40	20	2	
8557316	4	20	5	110	40	20	2	
8556010	4	25	-	120	50	25	2	
8557321	4	25	1	120	50	25	2	
8557322	4	25	2	120	50	25	2	
8557324	4	25	3	120	50	25	2	
8557325	4	25	4	120	50	25	2	
8557326	4	25	5	120	50	25	2	

AE-VMS RA


Milling | Solid carbide



Type 1

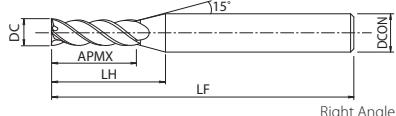

Right Angle



Right Angle



Type 2


- First choice in quality and performance
 - Carbide end mill with Durarise coating
 - Wide variety in applications and work materials
 - 4 flutes, variable helix and unequal spacing
 - With right angle for milling straight corners



Milling | Solid carbide


Right angle type for milling straight corners

Right Angle Type AE-VMSS.VMS(-RA)

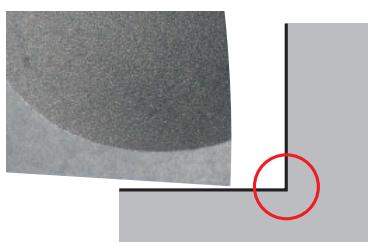

Straight corners with no uncut residue

**Square Type
AE-VMSS,VMS**

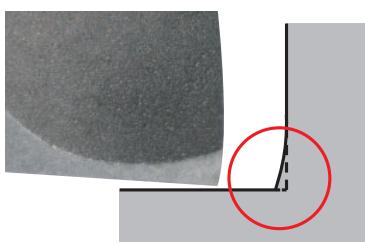

Choose the right angle type for
milling straight corners!

Choose the square type for high processing efficiency!

AE-VMSS


Milling | Solid carbide



Type 1



Type 2

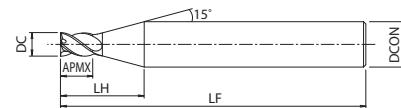

- First choice in quality and performance
- Carbide end mill with Durarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing
- Anti-vibration stub carbide end-mill, square type, stub length



EDP	ZEFP	DC	LF	APMX	LH	DCON	Type	Price
8556410	4	1	40	1,5	7,9	4	1	
8556411	4	1,1	40	1,7	8	4	1	
8556412	4	1,2	40	1,8	7,9	4	1	
8556413	4	1,3	40	2	7,9	4	1	
8556414	4	1,4	40	2,1	8	4	1	
8556415	4	1,5	40	2,3	7,8	4	1	
8556416	4	1,6	40	2,4	7,9	4	1	
8556417	4	1,7	40	2,6	7,7	4	1	
8556418	4	1,8	40	2,7	7,6	4	1	
8556419	4	1,9	40	2,9	7,7	4	1	
8556420	4	2	40	3	8,2	4	1	
8556421	4	2,1	40	3,2	8,2	4	1	
8556422	4	2,2	40	3,3	8,1	4	1	
8556423	4	2,3	40	3,5	8,1	4	1	
8556424	4	2,4	40	3,6	8	4	1	
8556425	4	2,5	40	3,8	8	4	1	
8556426	4	2,6	40	3,9	8,5	4	1	
8556427	4	2,7	40	4,1	8,5	4	1	
8556428	4	2,8	40	4,2	8,4	4	1	
8556429	4	2,9	40	4,4	8,4	4	1	
8556430	4	3	45	4,5	12,2	6	1	
8556431	4	3,1	45	4,7	12,2	6	1	
8556432	4	3,2	45	4,8	12,2	6	1	
8556433	4	3,3	45	5	12,2	6	1	
8556434	4	3,4	45	5,1	12,1	6	1	
8556435	4	3,5	45	5,3	12,1	6	1	
8556436	4	3,6	45	5,4	12	6	1	
8556437	4	3,7	45	5,6	12	6	1	
8556438	4	3,8	45	5,7	11,9	6	1	
8556439	4	3,9	45	5,9	11,9	6	1	
8556440	4	4	45	6	11,9	6	1	
8556441	4	4,1	45	6,2	12,1	6	1	
8556442	4	4,2	45	6,3	12	6	1	
8556443	4	4,3	45	6,5	12	6	1	
8556444	4	4,4	45	6,6	11,9	6	1	
8556445	4	4,5	45	6,8	11,9	6	1	
8556446	4	4,6	45	6,9	11,8	6	1	
8556447	4	4,7	45	7,1	11,9	6	1	
8556448	4	4,8	45	7,2	11,8	6	1	
8556449	4	4,9	45	7,4	11,8	6	1	
8556450	4	5	45	7,5	11,7	6	1	
8556451	4	5,1	45	7,7	11,7	6	1	
8556452	4	5,2	45	7,8	11,6	6	1	
8556453	4	5,3	45	8	11,6	6	1	
8556454	4	5,4	45	8,1	11,5	6	1	

AE-VMSS



Milling | Solid carbide



Type 1



Type 2

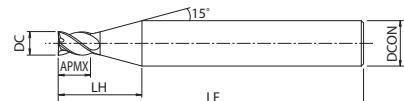

- First choice in quality and performance
 - Carbide end mill with Durarise coating
 - Wide variety in applications and work materials
 - 4 flutes, variable helix and unequal spacing
 - Anti-vibration stub carbide end-mill, square type, stub length



AE-VMSS RA


Milling | Solid carbide




Type 1



Type 2

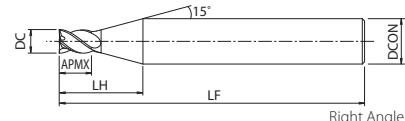

Right Angle




Right Angle

- First choice in quality and performance
 - Carbide end mill with Duarise coating
 - Wide variety in applications and work materials
 - 4 flutes, variable helix and unequal spacing
 - Anti-vibration stub carbide end-mill, stub length
 - With right angle for milling straight corners




Right angle type for milling straight corners

Right Angle Type AE-VMSS,VMS(-RA)

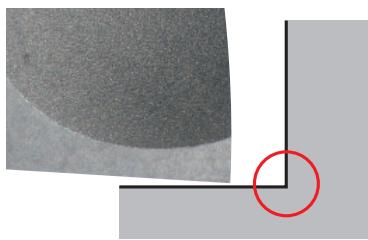


Straight corners with no uncut residue

Square Type
AE-VMSS,VMS

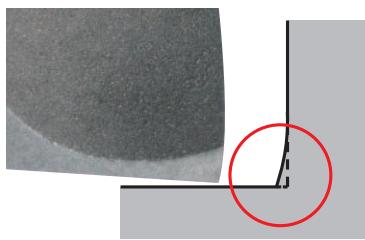

Choose the right angle type for
milling straight corners!

Choose the square type for high processing efficiency!

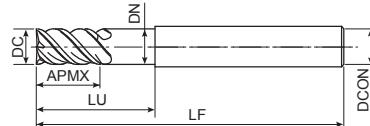

- First choice in quality and performance
 - Carbide end mill with Duarise coating
 - Wide variety in applications and work materials
 - 4 flutes, variable helix and unequal spacing
 - Long neck type




AE-VMSX NEW


Milling | Solid carbide




Type 1

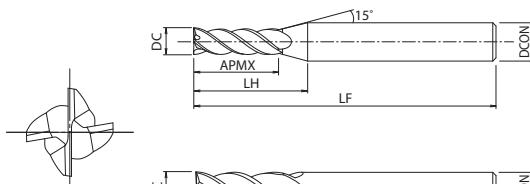


Type 2



- First choice in quality and performance
 - Carbide end mill with DUREOREY coating
 - 4 flutes, variable helix and unequal spacing
 - Reinforced cutting edge and micro relief




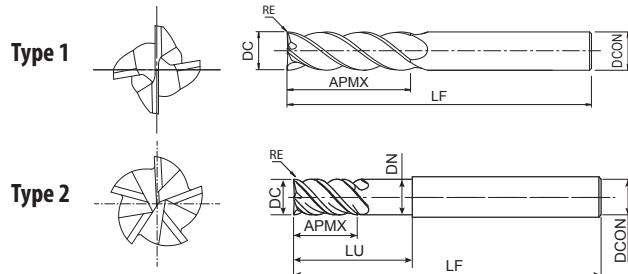


- First choice in quality and performance
- 4-5 flutes, square type, also with radius
- Anti-vibration long carbide end mill
- For side milling, length of cut up to 4xD



EDP	ZEFF	DC	RE	LF	APMX	LU	DN	DCON	ULDR	Type	Price
8556320	4	6	-	70	19	-	-	6	3	1	
8556336	4	6	0,3	70	19	-	-	6	3	1	
8556337	4	6	0,5	70	19	-	-	6	3	1	
8556338	4	6	1	70	19	-	-	6	3	1	
8556322	4	8	-	80	25	-	-	8	3	1	
8556339	4	8	0,3	80	25	-	-	8	3	1	
8556340	4	8	0,5	80	25	-	-	8	3	1	
8556341	4	8	1	80	25	-	-	8	3	1	
8556342	4	8	1,5	80	25	-	-	8	3	1	
8556343	4	8	2	80	25	-	-	8	3	1	
8556324	4	10	-	90	31	-	-	10	3	1	
8556344	4	10	0,3	90	31	-	-	10	3	1	
8556345	4	10	0,5	90	31	-	-	10	3	1	
8556346	4	10	1	90	31	-	-	10	3	1	
8556347	4	10	1,5	90	31	-	-	10	3	1	
8556348	4	10	2	90	31	-	-	10	3	1	
8556349	4	10	3	90	31	-	-	10	3	1	
8556326	4	12	-	100	38	-	-	12	3	1	
8556350	4	12	0,5	100	38	-	-	12	3	1	
8556351	4	12	1	100	38	-	-	12	3	1	
8556352	4	12	1,5	100	38	-	-	12	3	1	
8556353	4	12	2	100	38	-	-	12	3	1	
8556354	4	12	3	100	38	-	-	12	3	1	
8556374	5	16	-	125	50	-	-	16	3	1	
8556376	5	20	-	135	62	-	-	20	3	1	
8556328	4	6	-	70	24	-	-	6	4	1	
8556355	4	6	0,3	70	24	-	-	6	4	1	
8556356	4	6	0,5	70	24	-	-	6	4	1	
8556357	4	6	1	70	24	-	-	6	4	1	
8556330	4	8	-	90	32	-	-	8	4	1	
8556358	4	8	0,3	90	32	-	-	8	4	1	
8556359	4	8	0,5	90	32	-	-	8	4	1	
8556360	4	8	1	90	32	-	-	8	4	1	
8556361	4	8	1,5	90	32	-	-	8	4	1	
8556362	4	8	2	90	32	-	-	8	4	1	
8556332	4	10	-	100	40	-	-	10	4	1	
8556363	4	10	0,3	100	40	-	-	10	4	1	
8556364	4	10	0,5	100	40	-	-	10	4	1	
8556365	4	10	1	100	40	-	-	10	4	1	
8556366	4	10	1,5	100	40	-	-	10	4	1	
8556367	4	10	2	100	40	-	-	10	4	1	
8556368	4	10	3	100	40	-	-	10	4	1	
8556334	4	12	-	110	48	-	-	12	4	1	
8556369	4	12	0,5	110	48	-	-	12	4	1	
8556370	4	12	1	110	48	-	-	12	4	1	
8556371	4	12	1,5	110	48	-	-	12	4	1	
8556372	4	12	2	110	48	-	-	12	4	1	
8556373	4	12	3	110	48	-	-	12	4	1	
8556378	5	16	-	140	64	-	-	16	4	1	
8556380	5	20	-	155	80	-	-	20	4	1	
48330162	4	16	1	150	64	100	15,5	16	4	2	
48330202	4	20	1	150	80	100	19,4	20	4	2	





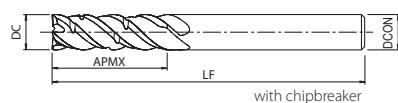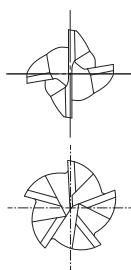

- First choice in quality and performance
- 4-5 flutes, square type, also with radius
- Anti-vibration long carbide end mill
- For side milling, length of cut up to 4xD
- Chipbreaker



EDP	ZEFP	DC	LF	APMX	DCON	Price
8556321	4	6	70	19	6	
8556329	4	6	70	24	6	
8556323	4	8	80	25	8	
8556331	4	8	90	32	8	
8556325	4	10	90	31	10	
8556333	4	10	100	40	10	
8556327	4	12	100	38	12	
8556335	4	12	110	48	12	
8556375	5	16	125	50	16	
8556379	5	16	140	64	16	
8556377	5	20	135	62	20	
8556381	5	20	155	80	20	

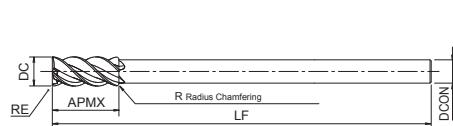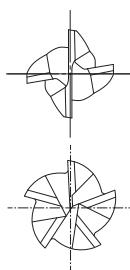

- First choice in quality and performance
 - 4-5 flutes, Square type & Radius type
 - Anti-Vibration Carbide End Mill for Deep Side Milling
 - For side milling, $2,5 \times D$ cutting length



page 36

EDP	ZEFP	DC	RE	LF	APMX	DCON	Price
8549916	4	6	-	100	15	4	
8549945	4	6	0,5	100	15	4	
8549918	4	8	-	110	20	6	
8549955	4	8	0,5	110	20	6	
8549920	4	10	-	130	25	8	
8549965	4	10	0,5	130	25	8	
8549966	4	10	1	130	25	8	
8549922	4	12	-	150	30	10	
8549975	4	12	0,5	150	30	10	
8549976	4	12	1	150	30	10	
8549924	5	14	-	160	35	12	
8549985	5	14	0,5	160	35	12	
8549986	5	14	1	160	35	12	
8549928	5	18	-	180	45	16	
8549995	5	18	0,5	180	45	16	
8549996	5	18	1	180	45	16	
8549932	5	22	-	200	55	20	
8550005	5	22	0,5	200	55	20	
8550006	5	22	1	200	55	20	



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VTSS

Slot Milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB	Precipitation Stainless Steel SUS630	Titanium Alloy Ti-6Al-4V								
Cutting Speed	100	70	60	60	50	50								
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
3	10.600	650	7.400	480	6.400	350	6.400	330	5.300	300				
4	8.000	670	5.600	500	4.800	350	4.800	340	4.000	320				
5	6.400	710	4.500	560	3.800	420	3.800	390	3.200	340				
6	5.300	740	3.700	620	3.200	460	3.200	260	2.700	330				
8	4.000	630	2.800	500	2.400	440	2.400	260	2.000	310				
10	3.200	580	2.200	490	1.900	380	1.900	240	1.600	290				
12	2.700	560	1.900	460	1.600	380	1.600	230	1.300	290				
Depth of cut	<table border="1"><tr><td>ap</td></tr><tr><td>0,5D</td></tr></table>							ap	0,5D	<table border="1"><tr><td>ap</td></tr><tr><td>0,25D</td></tr></table>			ap	0,25D
ap														
0,5D														
ap														
0,25D														

Side Milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB	Precipitation Stainless Steel SUS630	Titanium Alloy Ti-6Al-4V									
Cutting Speed	100	90	80	70	70	60									
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)					
3	10.600	960	9.600	610	8.500	460	7.400	310	7.400	330					
4	8.000	1.060	7.200	650	6.400	480	5.600	350	5.600	360					
5	6.400	1.150	5.700	690	5.100	540	4.500	370	4.500	370					
6	5.300	1.190	4.800	870	4.200	630	3.700	420	3.700	380					
8	4.000	1.020	3.600	870	3.200	620	2.800	400	2.800	300					
10	3.200	960	2.900	780	2.500	530	2.200	380	2.200	280					
12	2.700	810	2.400	720	2.100	440	1.900	360	1.900	280					
Depth of cut	<table border="1"><tr><td>ap</td></tr><tr><td>ID</td></tr><tr><td>0,2D</td></tr></table>							ap	ID	0,2D	<table border="1"><tr><td>ap</td></tr><tr><td>0,2D</td></tr></table>			ap	0,2D
ap															
ID															
0,2D															
ap															
0,2D															

Plunging

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB	Precipitation Stainless Steel SUS630	Titanium Alloy Ti-6Al-4V								
Cutting Speed	100	70	60	60	50	50								
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
3	10.600	250	7.400	115	6.400	110	6.400	110	5.300	60				
4	8.000	250	5.600	115	4.800	110	4.800	110	4.000	60				
5	6.400	285	4.500	120	3.800	110	3.800	110	3.200	65				
6	5.300	320	3.700	120	3.200	110	3.200	110	2.700	70				
8	4.000	300	2.800	110	2.400	100	2.400	100	2.000	65				
10	3.200	290	2.200	105	1.900	95	1.900	95	1.600	60				
12	2.700	275	1.900	100	1.600	90	1.600	90	1.300	55				
Depth of cut	<table border="1"><tr><td>ap</td></tr><tr><td>≤0,5D</td></tr></table>							ap	≤0,5D	<table border="1"><tr><td>ap</td></tr><tr><td>≤0,5D</td></tr></table>			ap	≤0,5D
ap														
≤0,5D														
ap														
≤0,5D														

1. Use a rigid and precise machine and holder.
2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel, precipitation stainless steel, titanium alloy.
6. Reduce speed and feed as well as depth of cut when high precision is required.



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMS

Square Type / Right Angle Type *

Slot Milling

* For right angle type, please use 70% of the speed and feed shown in the table below as reference.

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718												
Cutting Speed	100 (80-120) (m/min)	90 (70-110) (m/min)	80 (60-100) (m/min)	70 (50-80) (m/min)		70 (60-80) (m/min)		60 (50-70) (m/min)		25 (20-30) (m/min)												
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)												
3	10.600	930	9.600	690	8.500	510	7.400	470	8.540	430												
4	8.000	960	7.200	720	6.400	510	5.600	490	6.410	460												
5	6.400	1.020	5.700	800	5.100	610	4.500	560	5.120	490												
6	5.300	1.060	4.800	900	4.200	670	3.700	370	4.270	480												
8	4.000	910	3.600	720	3.200	640	2.800	370	2.750	450												
10	3.200	840	2.900	700	2.500	550	2.200	350	2.200	420												
12	2.700	810	2.400	670	2.100	550	1.900	330	1.830	420												
16	2.000	600	1.800	500	1.600	420	1.200	310	1.140	260												
20	1.600	480	1.400	390	1.300	340	900	250	920	270												
25	1.300	390	1.100	310	1.000	260	600	170	730	250												
Depth of cut	<table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>1D</td> <td></td> </tr> </table>				ap	ae	1D		Dc	ap	<table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>Dc≤6</td> <td>0,5D</td> </tr> <tr> <td>6<Dc</td> <td>1D</td> </tr> </table>				ap	ae	Dc≤6	0,5D	6<Dc	1D	ap	0,25D
ap	ae																					
1D																						
ap	ae																					
Dc≤6	0,5D																					
6<Dc	1D																					

Side Milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718				
Cutting Speed	130 (100-150) (m/min)	120 (100-150) (m/min)	100 (80-120) (m/min)	80 (60-100) (m/min)		80 (70-90) (m/min)		70 (60-80) (m/min)		30 (25-40) (m/min)				
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
3	13.800	1.660	12.700	1.070	10.600	760	8.000	480	9.760	510				
4	10.400	1.830	9.600	1.150	8.000	800	6.000	530	7.320	550				
5	8.300	1.990	7.600	1.220	6.400	900	4.800	560	5.860	560				
6	6.900	2.070	6.400	1.540	5.300	1.060	4.200	640	4.880	580				
8	5.200	1.770	4.800	1.540	4.000	1.040	3.200	610	3.200	450				
10	4.100	1.640	3.800	1.370	3.200	900	2.500	580	2.560	430				
12	3.500	1.400	3.200	1.280	2.700	760	2.100	530	2.140	420				
16	2.600	1.250	2.400	1.060	2.000	640	1.400	450	1.370	410				
20	2.100	1.010	1.900	840	1.600	510	1.100	370	1.100	390				
25	1.700	820	1.500	660	1.300	420	900	310	880	510				
Depth of cut	<table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>1,5D</td> <td>0,2D</td> </tr> </table>				ap	ae	1,5D	0,2D						
ap	ae													
1,5D	0,2D													

- The above milling condition is a guideline for the overhang length is 3xD.
- Use a rigid and precise machine and holder.
- The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
- Please use a suitable fluid with high smoke retardant properties.
- During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
- Please use water-soluble oil when machining stainless steel.
- Reduce speed and feed as well as depth of cut when high precision is required.
- Adjust the speed and feed accordingly when the overhang length is longer than specified.



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMS

Radius Type

Slot Milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718						
Cutting Speed	100 (80-120) (m/min)	90 (70-110) (m/min)	80 (60-100) (m/min)	70 (50-80) (m/min)		70 (60-80) (m/min)		60 (50-70) (m/min)		25 (20-30) (m/min)						
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)						
3	10.600	790	9.600	590	8.500	410	7.400	380	8.540	430						
4	8.000	820	7.200	610	6.400	410	5.600	390	6.410	460						
5	6.400	870	5.700	680	5.100	490	4.500	450	5.120	490						
6	5.300	1.010	4.800	860	4.200	600	3.700	330	4.270	480						
8	4.000	870	3.600	680	3.200	580	2.800	330	2.750	450						
10	3.200	800	2.900	660	2.500	500	2.200	320	2.200	420						
12	2.700	770	2.400	640	2.100	490	1.900	300	1.830	420						
16	2.000	570	1.800	480	1.600	370	1.200	290	1.140	260						
20	1.600	460	1.400	370	1.300	300	900	230	920	270						
25	1.300	370	1.100	290	1.000	230	600	150	730	250						
Depth of cut	<table border="1"> <tr> <td>ap</td> <td>dc</td> </tr> <tr> <td>1D</td> <td>Dc≤6, 0,5D 6<dc, 1D</td> </tr> </table>				ap	dc	1D	Dc≤6, 0,5D 6<dc, 1D	<table border="1"> <tr> <td>ap</td> </tr> <tr> <td>0,25D</td> </tr> </table>		ap	0,25D				
ap	dc															
1D	Dc≤6, 0,5D 6<dc, 1D															
ap																
0,25D																

Side Milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718				
Cutting Speed	130 (100-150) (m/min)	120 (100-150) (m/min)	100 (80-120) (m/min)	80 (60-100) (m/min)		80 (70-90) (m/min)		70 (60-80) (m/min)		30 (25-40) (m/min)				
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
3	13.800	1.660	12.700	1.070	10.600	760	8.000	480	9.760	510				
4	10.400	1.830	9.600	1.150	8.000	800	6.000	530	7.320	550				
5	8.300	1.990	7.600	1.220	6.400	900	4.800	560	5.860	560				
6	6.900	2.070	6.400	1.540	5.300	1.060	4.200	640	4.880	580				
8	5.200	1.770	4.800	1.540	4.000	1.040	3.200	610	3.200	450				
10	4.100	1.640	3.800	1.370	3.200	900	2.500	580	2.560	430				
12	3.500	1.400	3.200	1.280	2.700	760	2.100	530	2.140	420				
16	2.600	1.250	2.400	1.060	2.000	640	1.400	450	1.370	410				
20	2.100	1.010	1.900	840	1.600	510	1.100	370	1.100	390				
25	1.700	820	1.500	660	1.300	420	900	310	880	510				
Depth of cut	<table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>1,5D</td> <td>0,2D</td> </tr> </table>				ap	ae	1,5D	0,2D						
ap	ae													
1,5D	0,2D													

- The above milling condition is a guideline for the overhang length is 3xD.
- Use a rigid and precise machine and holder.
- The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
- Please use a suitable fluid with high smoke retardant properties.
- During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
- Please use water-soluble oil when machining stainless steel.
- Reduce speed and feed as well as depth of cut when high precision is required.
- Adjust the speed and feed accordingly when the overhang length is longer than specified.

Fix rate cutting condition

DC≥Ø6

	Work Material	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718	
Ø	L/D	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	(min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	
Side Milling	4	80%		70%		70%		60%		60%		50%
Side Milling	5	70%		60%		60%		50%		50%		50%
Slotting	4	90%		90%		80%		70%		70%		60%
Slotting	5	80%		80%		70%		70%		70%		60%

CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMSS

Square Type / Right Angle Type*

Slot milling

* For right angle type, please use 70% of the speed and feed shown in the table below as reference.

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718														
Cutting Speed	100 (80-120) (m/min)	90 (70-110) (m/min)	80 (60-100) (m/min)	70 (50-80) (m/min)		70 (60-80) (m/min)		60 (50-70) (m/min)		25 (20-30) (m/min)														
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)														
1	28.700	570	25.500	460	22.300	360	19.100	340	25.620	320														
1,5	19.100	610	17.000	480	14.900	420	12.700	360	16.980	360														
2	14.300	630	12.700	510	11.100	440	9.600	380	12.810	360														
2,5	11.500	780	10.200	570	8.900	460	7.600	430	10.190	410														
3	10.600	930	9.600	690	8.500	510	7.400	470	8.540	430														
4	8.000	960	7.200	720	6.400	510	5.600	490	6.410	460														
5	6.400	1.020	5.700	800	5.100	610	4.500	560	5.120	490														
6	5.300	1.060	4.800	900	4.200	670	3.700	370	4.270	480														
8	4.000	910	3.600	720	3.200	640	2.800	370	2.750	450														
10	3.200	840	2.900	700	2.500	550	2.200	350	2.200	420														
12	2.700	810	2.400	670	2.100	550	1.900	330	1.830	420														
Depth of cut	<table border="1"><tr><td>ap</td><td></td></tr><tr><td>1D</td><td></td></tr></table>				ap		1D		<table border="1"><tr><td>Dc</td><td>ap</td></tr><tr><td>Dc<6</td><td>0,5D</td></tr><tr><td>Dc>6</td><td>1D</td></tr></table>	Dc	ap	Dc<6	0,5D	Dc>6	1D	<table border="1"><tr><td>ap</td><td></td></tr><tr><td>0,25D</td><td></td></tr></table>					ap		0,25D	
ap																								
1D																								
Dc	ap																							
Dc<6	0,5D																							
Dc>6	1D																							
ap																								
0,25D																								

Side milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718				
Cutting Speed	130 (100-150) (m/min)	120 (100-150) (m/min)	100 (80-120) (m/min)	80 (60-100) (m/min)		80 (70-90) (m/min)		70 (60-80) (m/min)		30 (25-40) (m/min)				
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
1	38.200	840	28.700	690	25.500	510	22.300	450	29.280	370				
1,5	25.500	920	21.200	760	17.000	540	14.900	460	19.520	410				
2	19.900	1.430	17.500	840	14.300	630	11.100	470	14.640	440				
2,5	15.900	1.590	14.000	900	11.500	690	8.900	480	11.710	480				
3	13.800	1.660	12.700	1.070	10.600	760	8.000	480	9.760	510				
4	10.400	1.830	9.600	1.150	8.000	800	6.000	530	7.320	550				
5	8.300	1.990	7.600	1.220	6.400	900	4.800	560	5.860	560				
6	6.900	2.070	6.400	1.540	5.300	1.060	4.200	640	4.880	580				
8	5.200	1.770	4.800	1.540	4.000	1.040	3.200	610	3.200	450				
10	4.100	1.640	3.800	1.370	3.200	900	2.500	580	2.560	430				
12	3.500	1.400	3.200	1.280	2.700	760	2.100	530	2.140	420				
Depth of cut	<table border="1"><tr><td>ap</td><td>ae</td></tr><tr><td>1,5D</td><td>0,2D</td></tr></table>				ap	ae	1,5D	0,2D						
ap	ae													
1,5D	0,2D													

- The above milling condition is a guideline for the overhang length is 3xD.
- Use a rigid and precise machine and holder.
- The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
- Please use a suitable fluid with high smoke retardant properties.
- During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
- Please use water-soluble oil when machining stainless steel.
- Reduce speed and feed as well as depth of cut when high precision is required.
- Adjust the speed and feed accordingly when the overhang length is longer than specified.



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMSS

Long Neck Type

Side milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718				
	Cutting Speed	105 (80-120) (m/min)	95 (70-110) (m/min)	70 (50-90) (m/min)	60 (40-80) (m/min)	60 (50-70) (m/min)	50 (40-60) (m/min)	30 (20-35) (m/min)									
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)					
6	5.520	1.660	5.120	1.230	3.710	740	2.940	450	3.420	410	2.970	390	1.480	180			
8	4.160	1.420	3.840	1.230	2.800	730	2.240	430	2.240	320	1.950	300	1.110	160			
10	3.280	1.310	3.040	1.100	2.240	630	1.750	410	1.790	300	1.560	290	890	150			
12	2.800	1.120	2.560	1.020	1.890	530	1.470	370	1.500	290	1.300	280	740	150			
Depth of cut	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>1,5D</td> <td>0,2D</td> </tr> </table>												ap	ae	1,5D	0,2D	
ap	ae																
1,5D	0,2D																

1. Use a rigid and precise machine and holder.
 2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
 3. Please use a suitable fluid with high smoke retardant properties.
 4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
 5. Please use water-soluble oil when machining stainless steel.
 6. Reduce speed and feed as well as depth of cut when high precision is required.

Fix rate cutting condition

DC≥Ø6

	Work Material	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718	
		Ø	L/D	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
Side Milling	4	80%		70%		70%		60%		60%		50%		50%	
	5	70%		60%		60%		50%		50%		50%		50%	
Slotting	4	90%		90%		80%		70%		70%		60%		60%	
	5	80%		80%		70%		70%		70%		60%		60%	



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMSX Square Type

Slot Milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718											
	100 (80-120)		90 (70-110)		80 (60-100)		70 (50-80)		70 (60-80)		60 (50-70)		25 (20-30)											
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)										
3	10.600	930	9.600	690	8.500	510	7.400	470	8.540	430	7.430	410	2.650	160										
4	8.000	960	7.200	720	6.400	510	5.600	490	6.410	460	5.570	440	1.990	170										
5	6.400	1.020	5.700	800	5.100	610	4.500	560	5.120	490	4.460	470	1.590	180										
6	5.300	1.060	4.800	900	4.200	670	3.700	370	4.270	480	3.710	460	1.330	180										
8	4.000	910	3.600	720	3.200	640	2.800	370	2.750	450	2.390	430	1.000	200										
10	3.200	840	2.900	700	2.500	550	2.200	350	2.200	420	1.910	400	800	180										
12	2.700	810	2.400	670	2.100	550	1.900	330	1.830	420	1.590	400	660	180										
Depth of cut	<table border="1"><tr><td>ap</td></tr><tr><td>1D</td></tr></table>		ap	1D	<table border="1"><tr><td>DC</td><td>ap</td></tr><tr><td>DC<6</td><td>0,5D</td></tr><tr><td>6<DC</td><td>1D</td></tr></table>		DC	ap	DC<6	0,5D	6<DC	1D	<table border="1"><tr><td>ap</td></tr><tr><td>0,25D</td></tr></table>		ap	0,25D								
ap																								
1D																								
DC	ap																							
DC<6	0,5D																							
6<DC	1D																							
ap																								
0,25D																								

Slide Milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Hardened Steel STAVAX • HPM38 (~55HRC)		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718					
	130 (100-150)		120 (100-150)		100 (80-120)		70 (60-80)		80 (60-100)		80 (70-90)		70 (60-80)		30 (20-40)					
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
3	13.800	1.660	12.700	1.070	10.600	760	7.430	480	8.000	480	9.760	510	8.490	480	3.180	220				
4	10.400	1.830	9.600	1.150	8.000	800	5.570	530	6.000	530	7.320	550	6.370	530	2.390	240				
5	8.300	1.990	7.600	1.220	6.400	900	4.460	540	4.800	560	5.860	560	5.090	540	1.910	250				
6	6.900	2.070	6.400	1.540	5.300	1.060	3.720	550	4.200	640	4.880	580	4.240	550	1.590	250				
8	5.200	1.770	4.800	1.540	4.000	1.040	2.790	430	3.200	610	3.200	450	2.790	430	1.190	230				
10	4.100	1.640	3.800	1.370	3.200	900	2.230	410	2.500	580	2.560	430	2.230	410	960	220				
12	3.500	1.400	3.200	1.280	2.700	760	1.860	400	2.100	530	2.140	420	1.860	400	800	210				
Depth of cut	<table border="1"><tr><td>ap</td><td>ae</td></tr><tr><td>1,5D</td><td>0,2D</td></tr></table>		ap	ae	1,5D	0,2D														
ap	ae																			
1,5D	0,2D																			

1. The above milling condition is a guideline for the overhang length is 3xD.
2. Use a rigid and precise machine and holder.
3. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
4. Please use a suitable fluid with high smoke retardant properties.
5. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
6. Please use water-soluble coolant when machining stainless steel, precipitation stainless steel, titanium alloy, Ni-based alloy.
7. Reduce speed and feed as well as depth of cut when high precision is required.
8. Adjust the speed and feed accordingly when the overhang length is longer than specified.

Cutting Condition Guide for Changes in Overhang Length

DC≥Ø6

	Work Material	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Hardened Steel STAVAX • HPM38 (~55HRC)		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718	
		Ø	L/D	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
Slot Milling	4	80%		70%		70%		-		60%		60%		50%		50%	
Side Milling	5	70%		60%		60%		-		50%		50%		50%		50%	
Slot Milling	4	90%		90%		80%		60%		70%		70%		60%		60%	
Side Milling	5	80%		80%		70%		60%		70%		70%		60%		60%	



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VML

Long Type (Applies to square / radius / chipbreaker type)

$ae=0.05D$ • Standard side milling 3D

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718				
Cutting Speed	160 (140-180) (m/min)	150 (130-170) (m/min)	140 (120-160) (m/min)	125 (100-140) (m/min)		115 (90-130) (m/min)		105 (80-120) (m/min)		85 (70-90) (m/min)				
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
6	8.500	2.480	8.000	2.180	7.400	2.010	6.600	1.660	6.100	1.530				
8	6.400	1.870	6.000	1.630	5.600	1.520	5.000	1.260	4.600	1.160				
10	5.100	1.730	4.800	1.440	4.500	1.350	4.000	1.120	3.700	1.040				
12	4.200	1.430	4.000	1.200	3.700	1.110	3.300	920	3.000	840				
16	3.180	1.590	2.990	1.350	2.790	1.260	2.490	1.000	2.290	920				
20	2.550	1.280	2.390	1.080	2.230	1.000	1.990	800	1.830	730				
Depth of cut							<table border="1" style="margin-left: auto; margin-right: auto;"><tr><td>ap</td><td>ae</td></tr><tr><td>3D</td><td>0,05D</td></tr></table>		ap	ae	3D	0,05D		
ap	ae													
3D	0,05D													

1. Use a rigid and precise machine and holder.
 2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
 3. Please use a suitable fluid with high smoke retardant properties.
 4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
 5. Please use water-soluble coolant when machining stainless steel.

$ae=0.1D$ • High efficiency side milling 3D

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V						
Cutting Speed	220 (200-240) (m/min)	170 (150-190) (m/min)	135 (110-150) (m/min)	130 (110-150) (m/min)		120 (100-140) (m/min)		110 (90-130) (m/min)						
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
6	11.700	3.180	9.000	2.270	7.200	1.810	6.900	1.600	6.400	1.480				
8	8.800	2.390	6.800	1.710	5.400	1.360	5.200	1.210	4.800	1.120				
10	7.000	2.240	5.400	1.510	4.300	1.200	4.100	1.070	3.800	990				
12	5.800	1.860	4.500	1.260	3.600	1.010	3.500	910	3.200	830				
16	4.380	1.970	3.380	1.350	2.690	1.080	2.590	910	2.390	840				
20	3.500	1.580	2.710	1.080	2.150	860	2.070	720	1.910	670				
Depth of cut							<table border="1" style="margin-left: auto; margin-right: auto;"><tr><td>ap</td><td>ae</td></tr><tr><td>3D</td><td>0,1D</td></tr></table>		ap	ae	3D	0,1D		
ap	ae													
3D	0,1D													

$ae=0.15D$ • High efficiency side milling 3D

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V						
Cutting Speed	140 (120-160) (m/min)	100 (80-120) (m/min)	90 (70-110) (m/min)	85 (60-100) (m/min)		75 (50-90) (m/min)		65 (40-80) (m/min)						
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
6	7.400	1.860	5.600	1.300	4.800	1.110	4.500	950	4.000	840				
8	5.600	1.410	4.200	970	3.600	840	3.400	720	3.000	640				
10	4.500	1.350	3.300	860	2.900	750	2.700	650	2.400	580				
12	3.700	1.110	2.800	730	2.400	620	2.300	550	2.000	480				
16	2.790	1.120	1.990	700	1.790	630	1.690	570	1.490	510				
20	2.230	890	1.590	560	1.430	500	1.350	460	1.190	400				
Depth of cut							<table border="1" style="margin-left: auto; margin-right: auto;"><tr><td>ap</td><td>ae</td></tr><tr><td>3D</td><td>0,15D</td></tr></table>		ap	ae	3D	0,15D		
ap	ae													
3D	0,15D													

$ae\leq0.2D$ • High efficiency side milling 3D

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²	Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC	Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC	Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V						
Cutting Speed	100 (80-120) (m/min)	80 (60-100) (m/min)	70 (50-90) (m/min)	65 (40-80) (m/min)		55 (30-70) (m/min)		45 (20-60) (m/min)						
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)				
6	5.300	1.230	4.200	890	3.700	780	3.500	670	2.900	560				
8	4.000	930	3.200	680	2.800	590	2.600	500	2.200	420				
10	3.200	900	2.500	600	2.200	530	2.100	460	1.800	390				
12	2.700	760	2.100	500	1.900	460	1.700	370	1.500	330				
16	1.990	800	1.590	560	1.390	490	1.290	420	1.090	350				
20	1.590	640	1.270	440	1.110	390	1.040	340	880	290				
Depth of cut							<table border="1" style="margin-left: auto; margin-right: auto;"><tr><td>ap</td><td>ae</td></tr><tr><td>3D</td><td>0,20D</td></tr></table>		ap	ae	3D	0,20D		
ap	ae													
3D	0,20D													



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VML

Long type (Applies to square / radius / chipbreaker type)

$ae=0.05D$ • Standard side milling 4D

		Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718			
Cutting Speed	140 (120-160) (m/min)		130 (110-150) (m/min)		120 (100-140) (m/min)		115 (90-130) (m/min)		105 (80-120) (m/min)		95 (70-110) (m/min)		75 (60-80) (m/min)				
\emptyset	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)			
6	7.400	2.010	6.900	1.740	6.400	1.610	6.100	1.420	5.600	1.300	5.000	1.160	4.000	880			
8	5.600	1.520	5.200	1.310	4.800	1.210	4.600	1.070	4.200	980	3.800	880	3.000	660			
10	4.500	1.440	4.100	1.230	3.800	1.140	3.700	960	3.300	860	3.000	780	2.400	590			
12	3.700	1.180	3.500	1.050	3.200	960	3.100	810	2.800	730	2.500	650	2.000	500			
16	2.790	1.330	2.590	1.170	2.390	1.080	2.290	860	2.090	780	1.890	710	1.490	520			
20	2.230	1.060	2.070	930	1.910	860	1.830	690	1.670	630	1.510	570	1.190	420			
Depth of cut	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="width: 40px;">ap</td> <td style="width: 40px;">ae</td> </tr> <tr> <td>4D</td> <td>0,05D</td> </tr> </table>													ap	ae	4D	0,05D
ap	ae																
4D	0,05D																

1. Use a rigid and precise machine and holder.
 2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
 3. Please use a suitable fluid with high smoke retardant properties.
 4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
 5. Please use water-soluble coolant when machining stainless steel.

$ae=0.1D$ • High efficiency side milling 4D

		Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V					
Cutting Speed	200 (180-220) (m/min)		160 (140-180) (m/min)		130 (110-150) (m/min)		125 (100-140) (m/min)		115 (90-130) (m/min)		105 (80-120) (m/min)						
\emptyset	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)			
6	10.600	2.670	8.500	1.970	6.900	1.600	6.600	1.400	6.100	1.290	5.600	1.190					
8	8.000	2.020	6.400	1.480	5.200	1.210	5.000	1.060	4.600	980	4.200	890					
10	6.400	1.920	5.100	1.330	4.100	1.070	4.000	950	3.700	890	3.300	790					
12	5.300	1.590	4.200	1.090	3.500	910	3.300	790	3.000	720	2.800	670					
16	3.980	1.690	3.180	1.190	2.590	970	2.490	870	2.290	800	2.090	730					
20	3.180	1.350	2.550	960	2.070	780	1.990	700	1.830	640	1.670	580					
Depth of cut	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="width: 40px;">ap</td> <td style="width: 40px;">ae</td> </tr> <tr> <td>4D</td> <td>0,1D</td> </tr> </table>													ap	ae	4D	0,1D
ap	ae																
4D	0,1D																

$ae=0.15D$ • High efficiency side milling 4D

		Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V					
Cutting Speed	135 (110-150) (m/min)		115 (100-140) (m/min)		85 (60-100) (m/min)		75 (50-90) (m/min)		65 (50-80) (m/min)		55 (40-70) (m/min)						
\emptyset	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)			
6	7.200	1.670	6.100	1.290	4.500	950	4.000	770	3.400	650	2.900	560					
8	5.400	1.250	4.600	980	3.400	720	3.000	580	2.600	500	2.200	430					
10	4.300	1.200	3.700	890	2.700	650	2.400	530	2.100	460	1.800	400					
12	3.600	1.010	3.100	740	2.300	550	2.000	440	1.700	370	1.500	330					
16	2.690	1.080	2.290	800	1.690	590	1.490	480	1.290	420	1.090	330					
20	2.150	860	1.830	640	1.350	470	1.190	390	1.040	340	880	260					
Depth of cut	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="width: 40px;">ap</td> <td style="width: 40px;">ae</td> </tr> <tr> <td>4D</td> <td>$\leq 0,15D$</td> </tr> </table>													ap	ae	4D	$\leq 0,15D$
ap	ae																
4D	$\leq 0,15D$																




CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMFE

Applies to square / radius type)

Side milling

	Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ²		Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC		Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC		Stainless Steel SUS304 • SUS420 ≤200HB		Precipitation Stainless Steel SUS630		Titanium Alloy Ti-6Al-4V		Ni-Based Alloy Inconel 718	
Cutting Speed	120 (100-140) (m/min)		120 (100-140) (m/min)		120 (100-140) (m/min)		120 (100-140) (m/min)		115 (100-130) (m/min)		105 (90-120) (m/min)		70 (60-80) (m/min)	
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
6	6.370	2.550	6.370	2.290	6.370	2.040	6.370	1.910	6.100	1.590	5.570	1.340	3.720	740
8	4.780	1.910	4.780	1.720	4.780	1.530	4.780	1.430	4.580	1.190	4.180	1.000	2.790	560
10	3.820	1.530	3.820	1.380	3.820	1.220	3.820	1.150	3.660	950	3.340	800	2.230	490
12	3.180	1.270	3.180	1.140	3.180	1.020	3.180	950	3.050	790	2.790	670	1.860	410
14	2.730	1.090	2.730	980	2.730	870	2.730	820	2.620	680	2.390	570	1.590	480
18	2.120	850	2.120	760	2.120	680	2.120	640	2.030	530	1.860	450	1.240	370
22	1.740	700	1.740	630	1.740	560	1.740	520	1.660	430	1.520	360	1.010	300
Depth of cut														

Cutting Condition Guide for Changes in Overhang Length

	Mild Steel • Carbon Steel • Cast Iron • Alloy Steel • Tool Steel (~750N/mm ² ~30HRC)				Prehardened Steel • Hardened Steel • Stainless Steel 30~45HRC				Titanium Alloy • Ni-Based Alloy Ti-6Al-4V - Inconel 718			
Cutting Speed	Cutting Speed (m/min)	Feed (mm/min)	Depth of cut		Cutting Speed (m/min)	Feed (mm/min)	Depth of cut		Cutting Speed (m/min)	Feed (mm/min)	Depth of cut	
L/D			ap	ae			ap	ae			ap	ae
6	80%	80%	1,7D	0,08D	80%	80%	1,7D	0,08D	80%	80%	1,7D	0,08D
7	65%	65%	1,6D	0,05D	65%	65%	1,6D	0,05D	65%	65%	1,6D	0,05D
8	50%	50%	1,5D	0,03D	40%	40%	1,5D	0,03D	30%	30%	1,5D	0,03D




CUTTING DATA

Suppression of Burrs

Great surface finish without vibration and minimal burrs.


Tool	AE-VMS Ø 10	Competitor Ø 10
Work Material	SUS316	
Cutting Speed	69m/min (2.200 min ⁻¹)	
Feed Rate	350mm/min (0,04mm/t)	
Depth of Cut	ap = 10mm	ap=5mm
Coolant	Water Soluble	
Machine	Vertical Machining Center	
M.R.R.	35 cm ³ /min	17,5 cm ³ /min

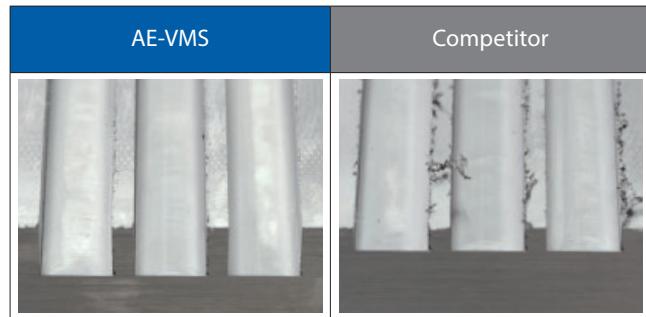

Stable Performance

Consistent tool wear with no chipping even in stainless steel slot milling.

Tool	AE-VMS Ø 10
Work Material	SUS304
Cutting Speed	70m/min (2.250 min ⁻¹)
Feed Rate	475mm/min (0,053mm/t)
Depth of Cut	ap = 10mm
Coolant	Water Soluble
Machine	Vertical Machining Center

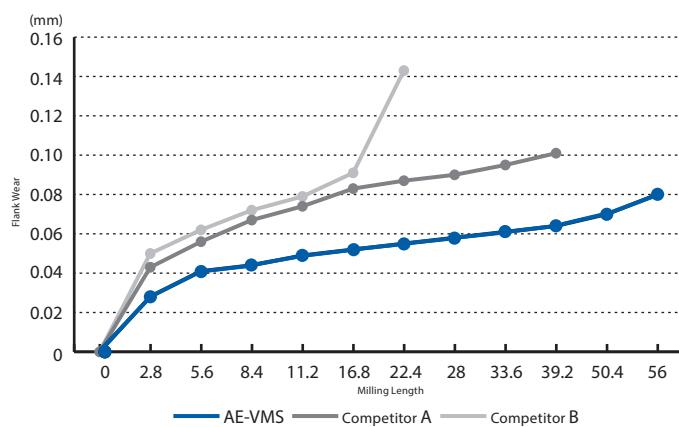

Cutting edge wear comparison




CUTTING DATA

Stable performance


Stable performance even in slotting

Tool	AE-VMS Ø 6 X R1
Work Material	SUS304
Milling method	Slot milling
Cutting Speed	80m/min (4.200 min ⁻¹)
Feed Rate	830mm/min (0,049 mm/t)
Depth of Cut	ap = 3mm
Coolant	Water Soluble
Machine	Horizontal Machining Center

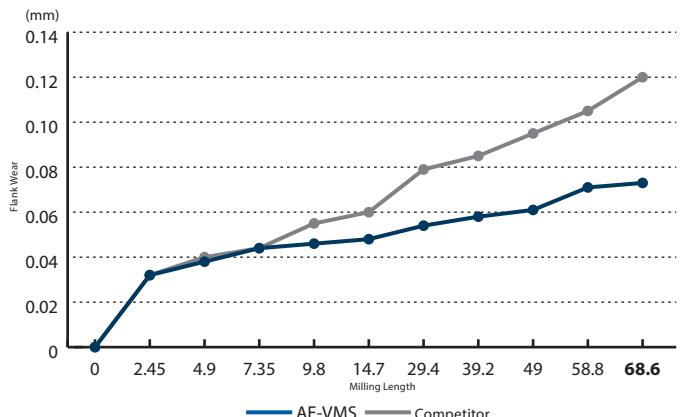

Wear comparison


Wear comparison after milling 68,6

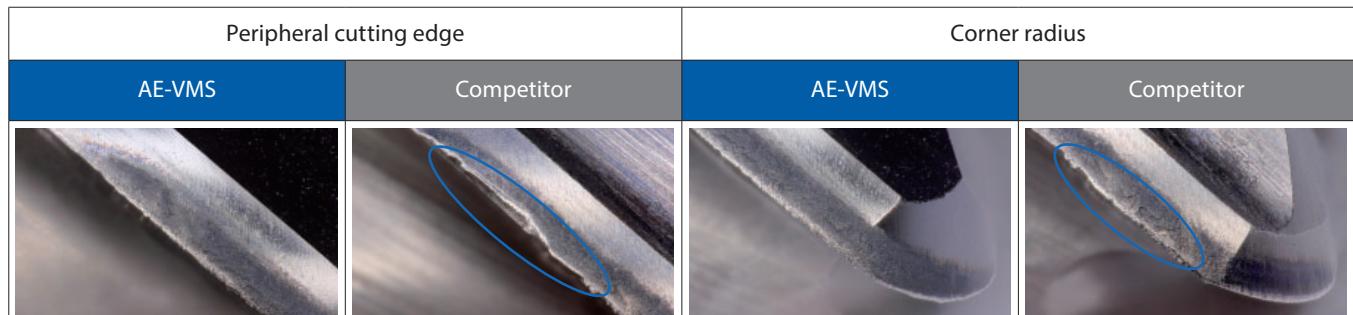

High efficiency

Trouble-free chip evacuation even in high-speed slotting

Tool	AE-VMS Ø 10 X R1
Work Material	SCM440
Milling method	Slot milling
Cutting Speed	90m/min (2.900 min ⁻¹)
Feed Rate	660mm/min (0,057 mm/t)
Depth of Cut	ap = 10mm
Coolant	None
Machine	Vertical Machining Center

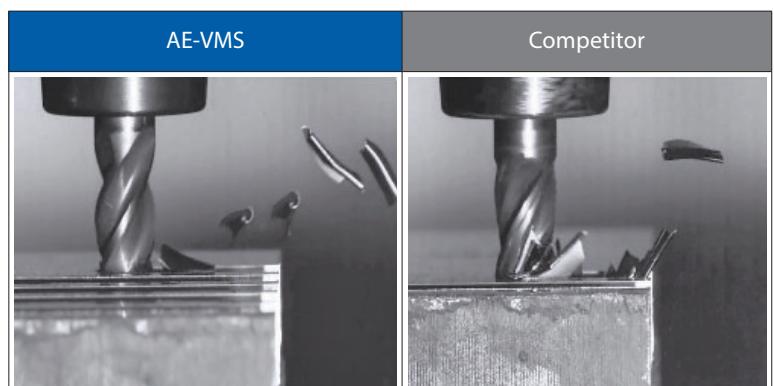


CUTTING DATA

Suppression of Burrs


Suppression of cutting heat generation minimizes tool wear

Tool	AE-VMS Ø 6
Work Material	SCM440
Cutting Speed	140m/min (7.500 min ⁻¹)
Feed Rate	1.800mm/min (0,06mm/t)
Depth of Cut	$ap = 9\text{mm}$ $ae = 1,2\text{mm}$
Coolant	Air Blow
Machine	Vertical Machining Center

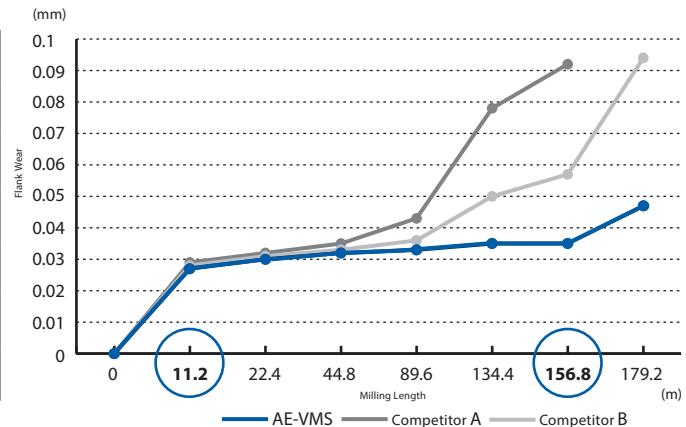


Surface roughness comparison

Surface roughness after milling 11,2m

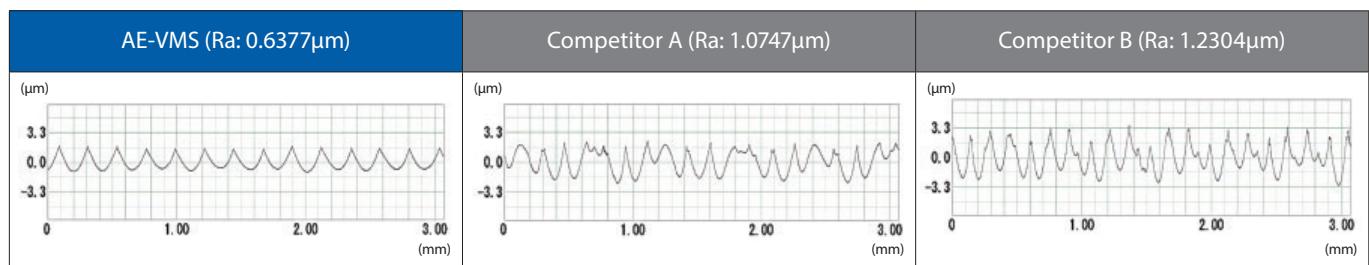

Tool condition comparison

Tool condition after milling 156,8m

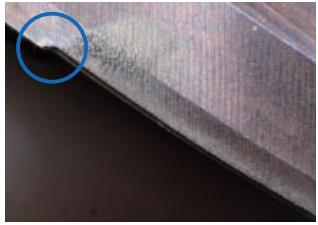	Cutting Chips	Wear Comparison
AE-VMS	 Brown about 500°C	 No Cutting Edge Recession
Competitor A	 Purple about 600°C	 Excessive Cutting Edge Recession
Competitor B	 Blue about 700°C	 Minimal Cutting Edge Recession




Environmental Considerations

Promotion of sustainable machining environment


Strengthening the cutting edge with microrelief and cutting edge honing achieve stable wear progression without chipping even during deep cuts. Longer tool life contributes to reducing waste and conserve resources.

Tool	AE-VMSX Ø 10
Work Material	NAK80 (40HRC)
Milling Method	Side Milling
Cutting Speed	100m/min (3.200min^{-1})
Feed Rate	900mm/min (0,07mm/t)
Depth of Cut	$\text{ap} = 15\text{mm}$ $\text{ae}=2\text{mm}$
Coolant	Air Blow
Machine	Vertical Machining Center

Large cutting depth enables high-efficiency machining, which in turn reduces machine operating time and lowers power consumption.

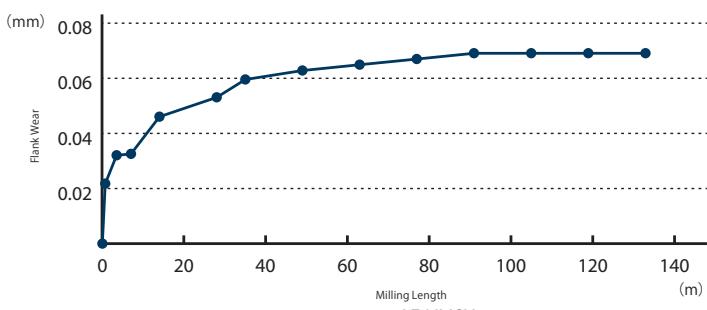


Wear comparison of the peripheral cutting edge

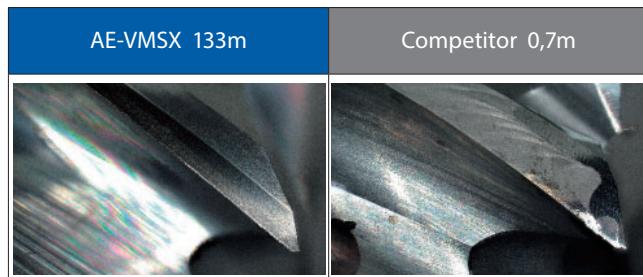


Long Tool Life

Stable machining of hot die steel DH31-S

Tool	AE-VMSX Ø 10
Work Material	DH31-S (48HRC)
Milling Method	Side Milling
Cutting Speed	60m/min (1.900min^{-1})
Feed Rate	300mm/min (0,039mm/t)
Depth of Cut	$\text{ap} = 15\text{mm}$ $\text{ae}=2\text{mm}$
Coolant	Water-soluble
Machine	Vertical Machining Center

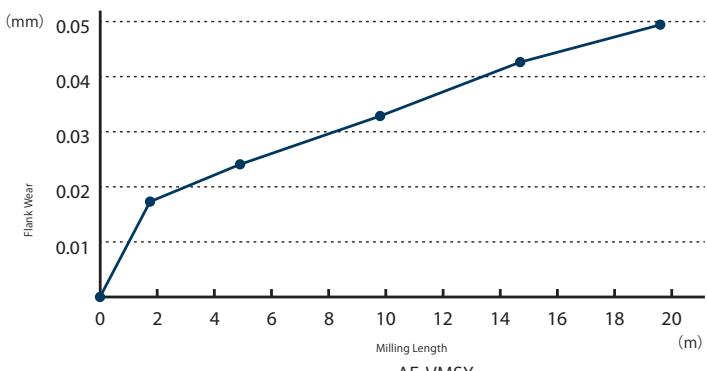

Wear comparison of the peripheral cutting edge


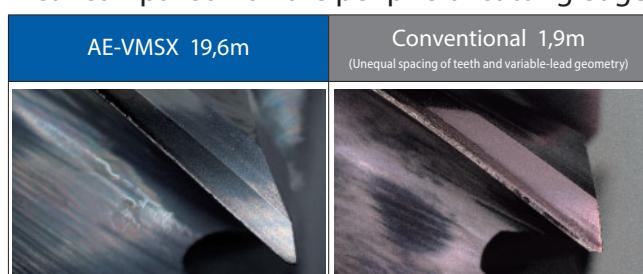


CUTTING DATA

High Efficiency

Highly efficient machining of tempered alloy steel with deep cuts

Work Material: SCM440 (40 HRC)
 Machine: Vertical Machining center
 Main Spindle: HSK-A63
 Maximum RPM: 20.000 min⁻¹
 Holder: Shrink Fit
 Coolant: Air-blow
 Total Machining time: 13 minutes 6 seconds

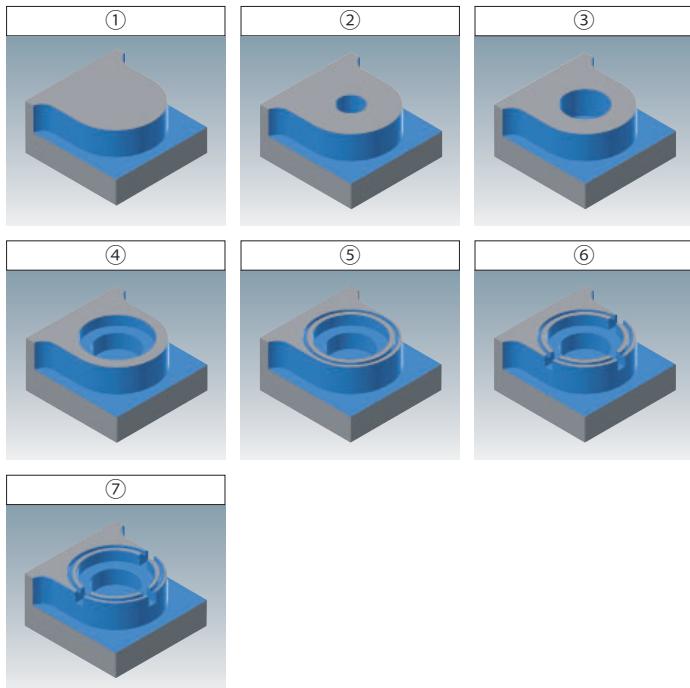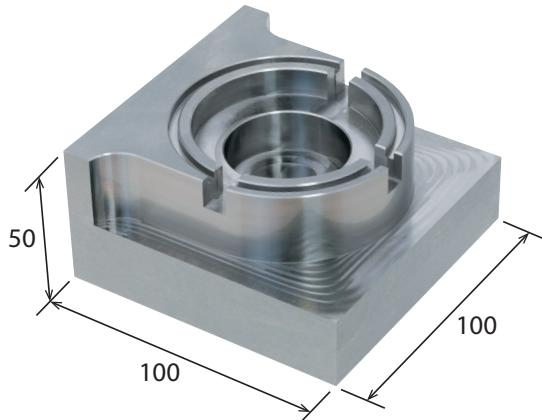


Process	Milling Part	Milling Process	Tool	Cutting Speed (m/min)	Feed (mm/min)	ap (mm)	ae (mm)	Machining Time
①	Side	Side Milling	AE-VMSX Ø12	100 (2.700min ⁻¹)	760 (0,07mm/t)	25	2,4	3 minutes 41 seconds
②	Counterbore	Helical Milling (Roughing)				1,5° Helical Angle	R6 Helical Radius	4 minutes 26 seconds
③	Counterbore	Enlarging				25	2,4	51 seconds
④	Counterbore	Enlarging				10	2,4	1 minute 24 seconds
⑤	3mm Slot Width	Slot Milling	AE-VMSX Ø3	80 (8.500min ⁻¹)	510 (0,015mm/t)	3° Ramping Angle	3	37 seconds
⑥	8mm Slot Width	Slot Milling	AE-VMSX Ø8	80 (3.200min ⁻¹)	640 (0,05mm/t)	10	8	10 seconds
⑦	C0.2 Chamfering	Chamfering	HY-HSCM-P 2x45°x6x5F	100 (5.300min ⁻¹)	530 (0,02mm/t)	0,2	0,2	1 minute 57 seconds

Stable Performance


Stable wear progression even when machining titanium alloys

Tool	AE-VMSX Ø 6
Work Material	Ti-6Al-4V
Milling Method	Side Milling
Cutting Speed	80m/min (4.250min ⁻¹)
Feed Rate	550mm/min (0,032mm/t)
Depth of Cut	$\text{ap} = 9\text{mm}$ $\text{ae}=0,3\text{mm}$
Coolant	Water-soluble
Machine	Vertical Machining Center

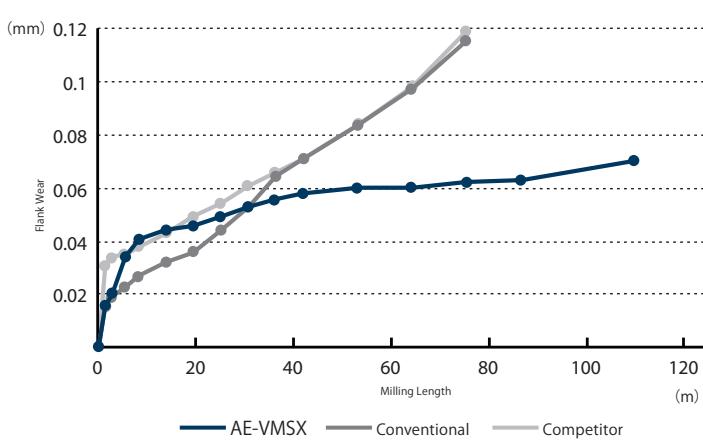

AE-VML: WITH CHIPBREAKER

Minimizes chipping with unique R profiles at the edge of the chipbreaker.

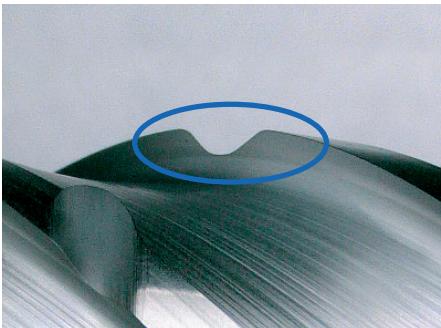

Troubled by long and stringy chip accumulation




Large chip accumulation can be problematic for long-hour and high chip removal side milling, trochoidal milling, and pocket milling with long flute length end mills.

Breaks chips into small pieces!

Enables continuous machine operation

The chipbreaker (-N) creates small chips that can be easily evacuated by air or cutting oil.

For high-quality machined surfaces, we recommend the AE-VML square type without chipbreaker.

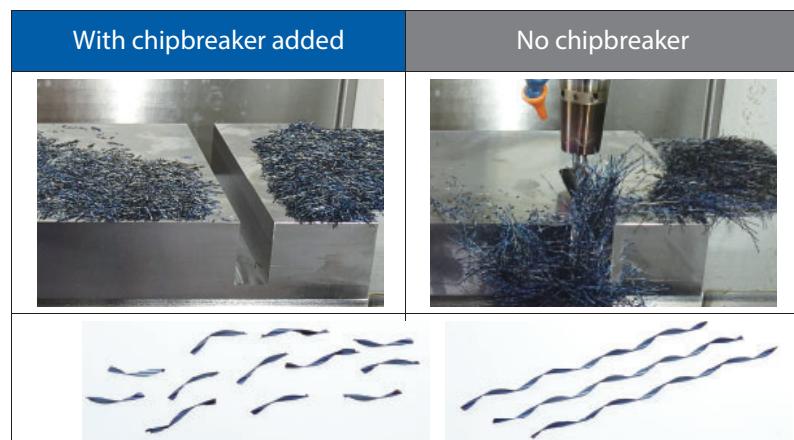

Tool	AE-VML φ10×40-N With chipbreaker	Feed Rate	1,140mm/min 0.075mm/t
Work Material	NAK80(40HRC)	Depth of Cut	ap=40mm ae=0.5mm
Milling Method	Trochoidal	Coolant	Air blow
Cutting Speed	120m/min 3,800min ⁻¹	Machine	BT50 Vertical Machining Center




CUTTING DATA


Stable performance

Stable performance even at 4D depth of cut

Tool	AE-VML Ø 10 x 40
Work Material	S50C
Milling Method	Side milling
Cutting Speed	130m/min (4,200min ⁻¹)
Feed Rate	1.200mm/min (0,07mm/t)
Depth of Cut	ap=40mm ae=0.5mm
Coolant	Air Blow
Machine	Horizontal Machining Center

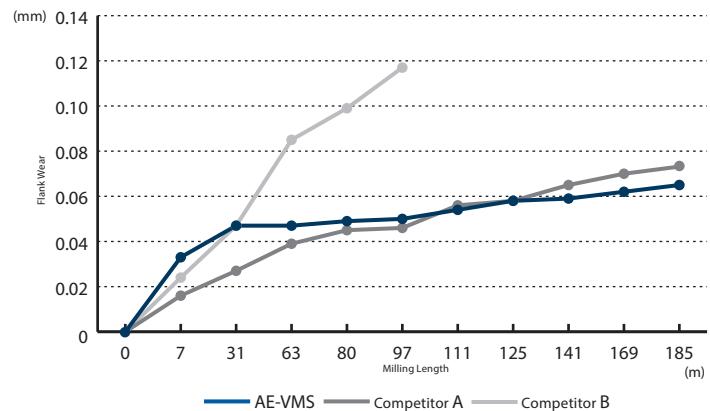


Wear comparison of the peripheral cutting edge

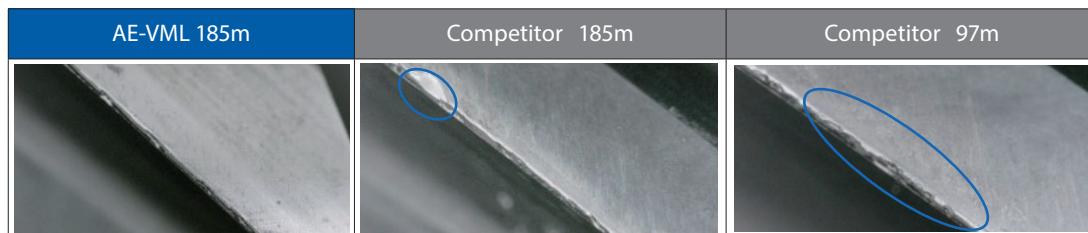


Long tool life

DUARISE coating greatly reduces tool wear progression even with the use of water-soluble coolant.

Tool	AE-VML Ø 10 x 31
Work Material	SCM440(30HRC)
Milling Method	Side milling
Cutting Speed	180m/min (5.700min ⁻¹)
Feed Rate	1.400mm/min (0,06mm/t)
Depth of Cut	ap=25mm ae=1mm
Coolant	Water Soluble
Machine	Vertical Machining Center

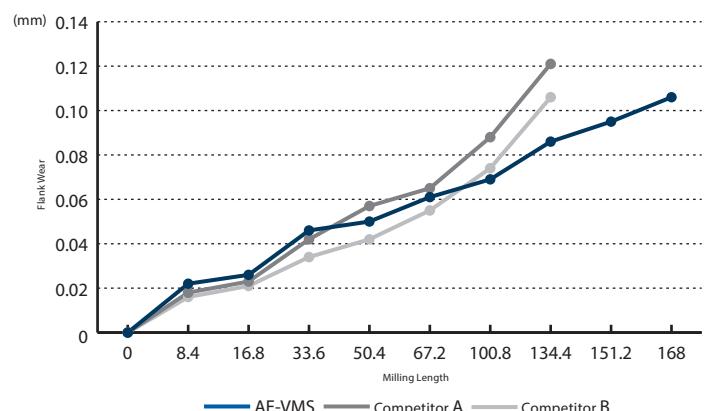

Wear comparison of the peripheral cutting edge

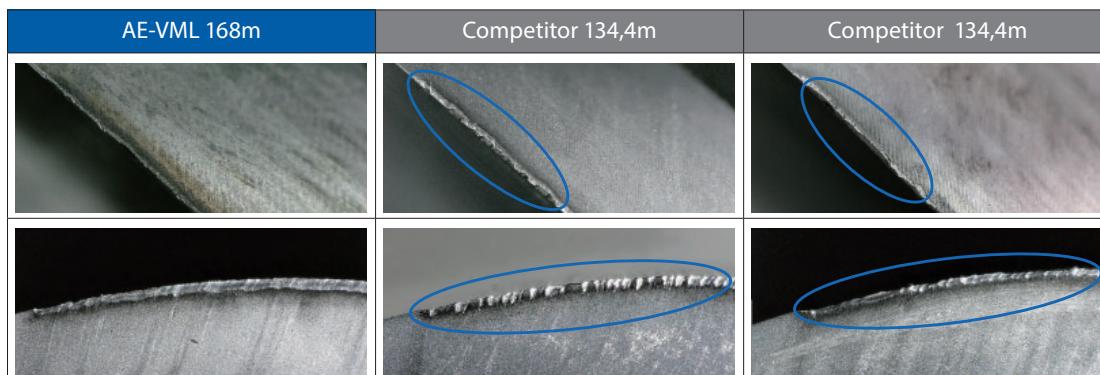



shaping your dreams

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 07
info@osgeurope.com

OSG POLAND Sp. z.o.o.

Spółdzielcza 57
05-074 Halinów - Poland
Tel: +22 760 82 71
osg@osg-poland.com

OSG ROMANIA SRL

25C, Bucuresti-Magurele Street (Sector 5)
051431 Bucuresti - România
Tel: +40 21 322 07 47
info@osgromania.ro

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 11
info@osg-belgium.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen - Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de

AUSTRIA

Branch office of OSG GERMANY
Messestraße 11
A-6850 Dornbirn
Tel: +49 7161 6064-0
info@osg-germany.de

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte - France
Tel: +33 1 49 90 10 10
sales@osg-france.com

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde - Denmark
Tel: +45 46 75 65 55
osg@osg-scandinavia.com

OSG ITALIA

Via Ferrero, 65 A/B3
I - 10098 Rivoli - Italy
Tel: +39 0117705211
info@osg-italia.it

OSG NETHERLANDS

Bedrijfsweg 5 - 3481 MG Harmelen
Tel: +31 348 44 2764
info@osg-nl.com

SWEDEN

Branch office of OSG SCANDINAVIA
Singelgatan 7
212 28 Malmö - Sweden
Tel: +46 40 41 22 55
osg@osg-scandinavia.com

Vischer & Bolli AG

Machining and Workholding
Im Schossacher 17
CH-8600 Dübendorf
T +41 44 802 15 15
info@vb-tools.com

OSG UK

Kelsey Close, Attleborough Fields Ind Est,
CV11 6RS, Nuneaton, United Kingdom.
Tel: +44 1827 720 013
uk_sales@osg-uk.com

OSG IBERICA

Bekolarra 4
E - 01010 Vitoria-Gasteiz - Spain
Tel: +34 945 242 400
osg.iberica@osg-ib.com

OSG TURKEY

Rami Kışla Cad.No:56 Eyüp
İstanbul 34056 - Turkey
Tel+90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

OSG EUROPE LOGISTICS S.A.

08/2025 - All rights reserved. © OSG Europe 2025.

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

www.osgeurope.com